



JOVIAL

JOVGFW3

Foldable 3-Wheel Golf Push Cart

New Deluxe Scorecard Holder,
Upper & Lower Brackets with Strap

USER GUIDE

WARNING:

- For your own safety, please read and understand these warnings and keep this user guide for future reference.
- Always make sure the cart is fully extended and locked before use. Always make sure the cart is folded and locked properly before lifting or transporting.
- Do not run while using this product.
- Do not use accessories other than those designed for use with your cart.
- Keep all packing materials away from children and recycle where possible or where required by law.

MAINTENANCE

- To clean the trolley, wipe with a soft, dry cloth.
- Car polish may be used to maintain finish.
- Lubricate moving parts every 6 months.


WARNING:

- Keep hands and fingers away from moving or sliding parts!
- Always keep control of the Golf Push Cart -
Do not let it run down hills without full control.



PARTS LIST

- A** Handle grip
- B** Umbrella holder dock
- C** Scorecard holder
- D** Handle tube
- E** Umbrella holder storage
- F** Upper bag holder bracket
- G** Adjustable handle mechanism
- H** Main upper frame tube
- I** Folding/locking buckle
- J** Anti-splay wire
- K** Leg bracket
- L** Connecting rods
- M** Main lower frame tube
- N** Foot brake
- O** Stabilizer tube
- P** 2 holes leg frame
- Q** 4 holes leg frame
- R** Right wheel locking mechanism
- R1** Left wheel locking mechanism
- S** Main wheel
- T** Adjustable bag elastic
- U** Lower bag holder bracket
- V** Front wheel assembly

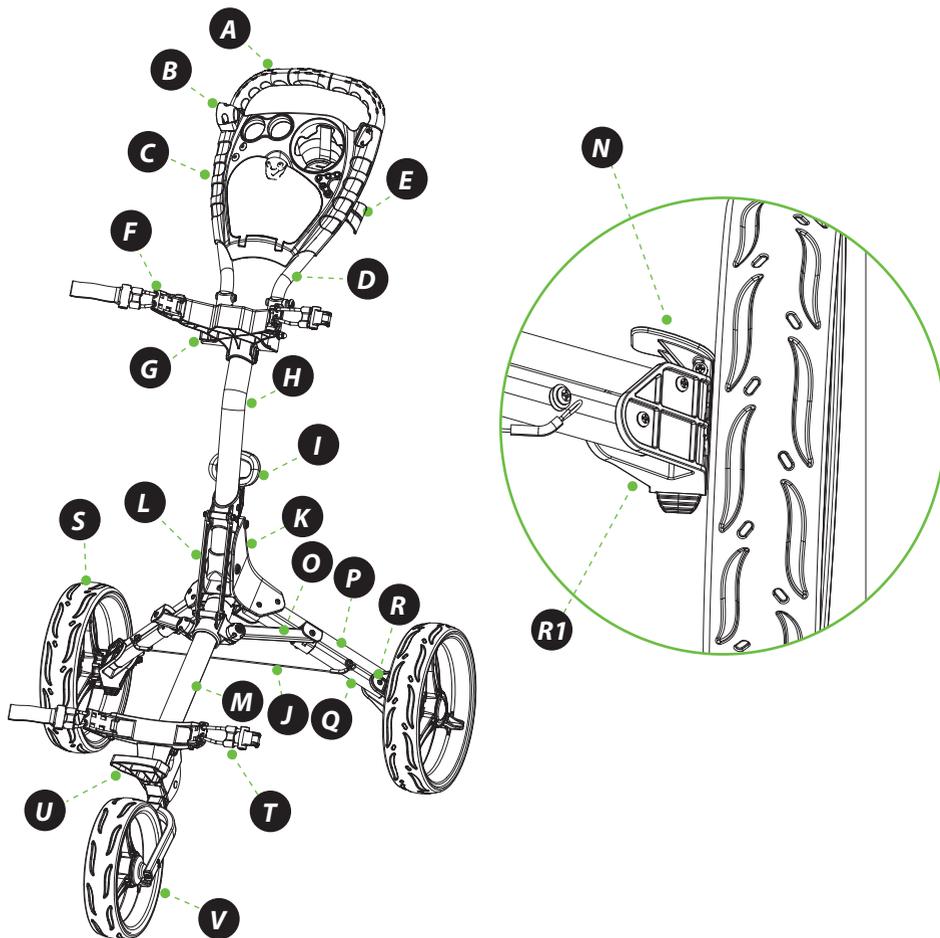


UNFOLDING STEPS

Fig. 1 elastic rope




Loosen the elastic rope as Fig. 1.

Fig. 2 buckle

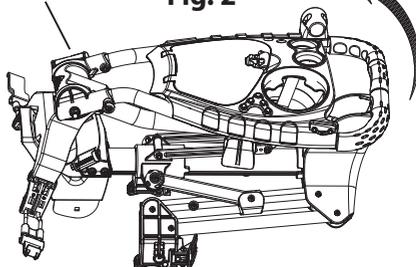


Release the handle buckle to fully extend the handle frame then lock the locking buckle as Fig. 2.

Fig. 3

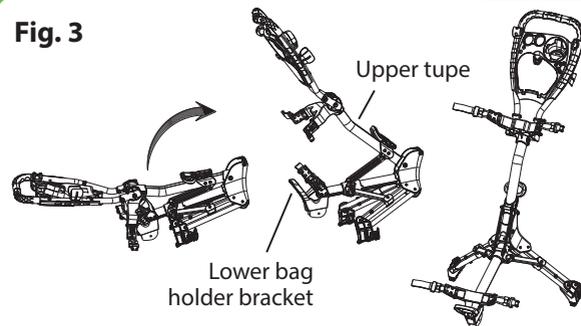

Hold the upper tube and lower bracket to open the frame as Fig. 3

Fig.4



Release the wheel locking buckle, insert the wheel axel into the wheel holder completely and then tighten the locking buckle.

Fig.5



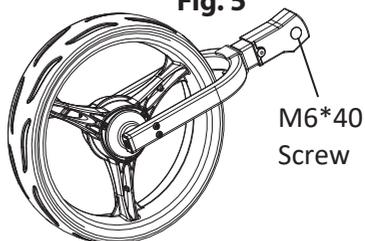


Fig. 6




Remove the M6*40 screw and M6 nut from the front wheel fork as Fig. 6, then assemble the front wheel on the steel piece of lower bag bracket and fixed it by screw and nut, completely assembly as Fig. 7.


Fig.7

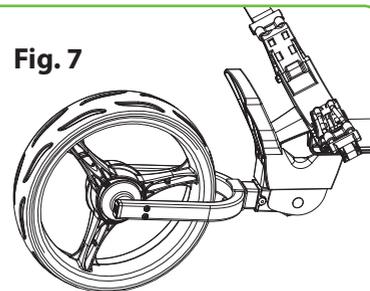



FOLDING STEPS




Folding the front wheel as Fig. 8.



Pull the folding pulling buckle and press the handle to fold the trolley as Fig. 9 & 10.

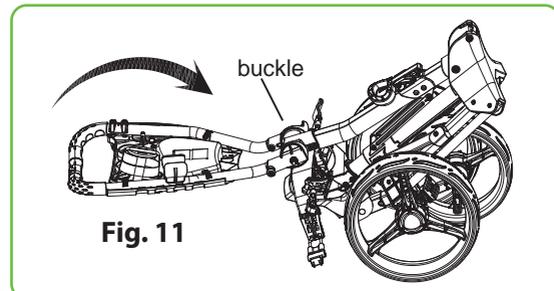


Release the buckle to fold the handle as Fig. 11, then fix the buckle.




Fixed the frame through elastic rope as Fig. 13. Folding status as Fig. 12. Pick up the trolley using the handle and not the tubing when lifting into car boot etc.



Fig. 13






Using the brake
Press the brake pedal to stop and press again to release as Fig. 14.



Warning:
Pick up the trolley using the handle and not the tubing when lifting into car boot etc.

FRONT WHEEL ADJUSTMENT MECHANISM

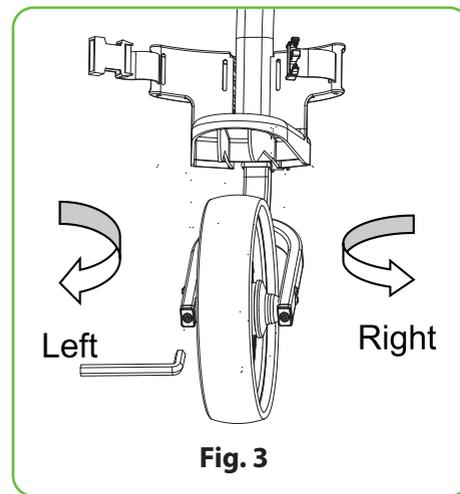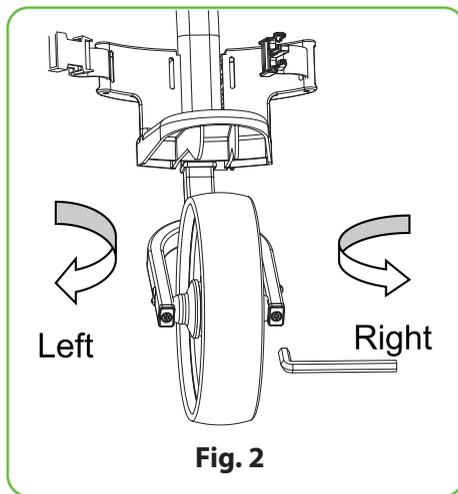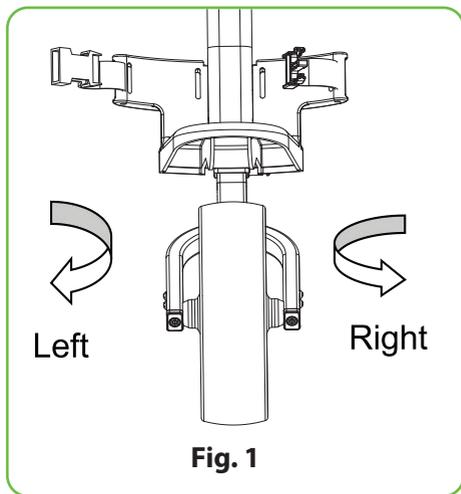

1. If during use, you find the cart veers to the right or left, please see the instructions to correct this problem. (Fig. 1)

2. If the cart veers to the left, face the front wheel of the cart and use the Allen wrench provided to screw the right bolt counterclockwise or the left bolt clockwise until the front wheel is centered between the front fork. (Fig. 2)

3. If the cart veers to the right, face the front wheel of the cart and use the Allen wrench provided to screw the left bolt counterclockwise or the right bolt clockwise until the front wheel is centered between the front fork. (Fig. 3)

FEATURES:


- New Deluxe Scorecard Holder
- Upper and Lower Bracket with Strap
- Foam Handle Grip
- Ergonomic Padded Adjustable Handle
- Includes Scorecard Holder, and Patented Bag Holder
- Simple Quick Braking System
- Durable and Compact Size for Easy Storage and Transportation
- Easy to Fold and Unfold
- Designed for Multiple Pushing Positions

WHAT'S IN THE BOX:

- (1) 3-Wheel Golf Push Cart

TECHNICAL SPECS:

- Construction Material: AL Frame
- Max. Load Capacity: 33.1 lbs.
- Front Wheel Size: 9.5" -inches
- Rear Wheels Size: 11.5" -inches
- Folded Product Dimension (L x W x H): 14.4" x 19.1" x 23.1" -inches
- Unfolded Product Dimension (L x W x H): 28" x 47.3" x 45.1" -inches

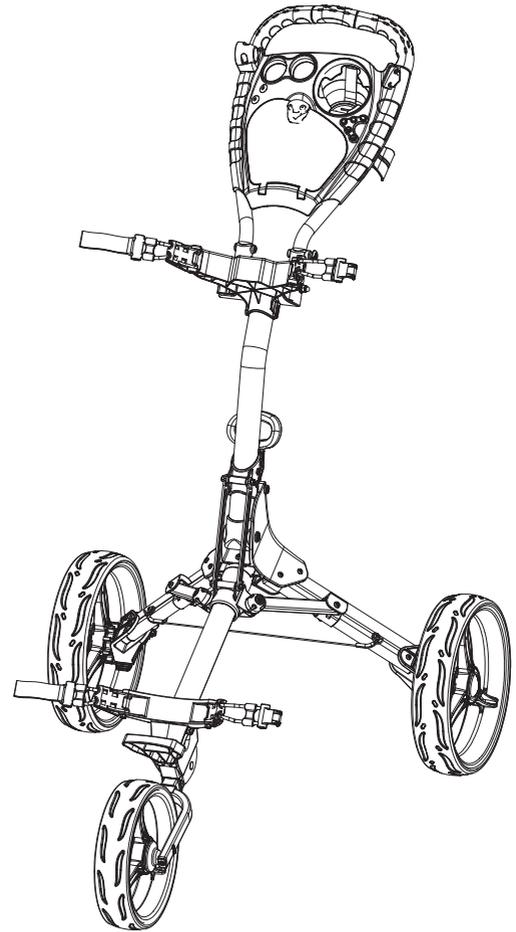



JOVIAL

Questions? Comments?

We are here to help!

Phone: (1) 718-535-1800

Email: support@pyleusa.com

