

Visit Our Website



**SCAN ME**  
PyleUSA.com

# IN-CEILING SPEAKERS

# PYLE


PyleUSA.com

## USER GUIDE

	PDIC1651RD	PDIC1661RD	PDIC1681RD
	(2) 5.25-inch Speakers	(2) 6.5-inch Speakers	(2) 8.0-inch Speakers
MAX Power Output	150 Watt	200 Watt	250 Watt
Sensitivity	88 dB	88 dB	89 dB
Frequency Response	80Hz-20kHz	70Hz-20kHz	50Hz-20kHz
Total Unit Dimensions (Diameter x Depth)	8.0" x 3.0"	9.0" x 3.1"	10.7" x 3.5"
Cutout Diameter	6.5", Cutout Mounting Depth: 2.6"	7.6", Cutout Mounting Depth: 2.8"	9.3", Cutout Mounting Depth: 3.0"
Single Speaker Weight	4.7 lbs.	6.6 lbs.	9.14 lbs.
Both Speaker Weight	10.0 lbs.	13.7 lbs.	18.79 lbs.

### Features:

- In-Wall / In-Ceiling System
- Quick Connect Spring-Loaded Speaker Terminals
- 1/2" High Compliance Polymer Tweeter
- Polypropylene Cone with Rubber Edge
- Cut-Out Size Template for Easy Installation
- Environmentally Friendly ABS Construction
- Perfect for Custom Installations & Applications
- Includes Stain Resistant Grills
- Impedance: 16 Ohms



### California Prop 65 Warning

#### WARNING:


This product can expose you to chemicals, which is known to the state of California to cause cancer birth defects and other reproductive harm. Do not ingest.

For more info go to: [www.P65warnings.ca.gov](http://www.P65warnings.ca.gov)




**Questions or Comments?**  
**We are here to help!**  
Phone: 1.718.535.1800  
[PyleUSA.com/ContactUs](http://PyleUSA.com/ContactUs)

## Installation

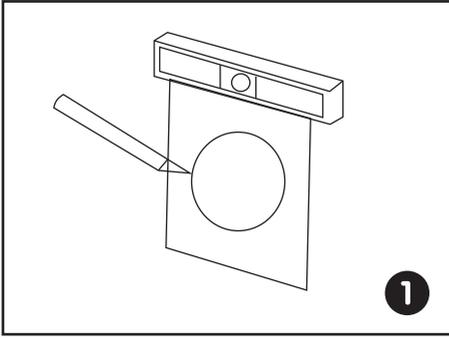


### Cut the drywall.


**Note:** Always allow at least one-half inch between a wall stud and the speaker cutout, or the locking tabs will not be able to swivel into place.

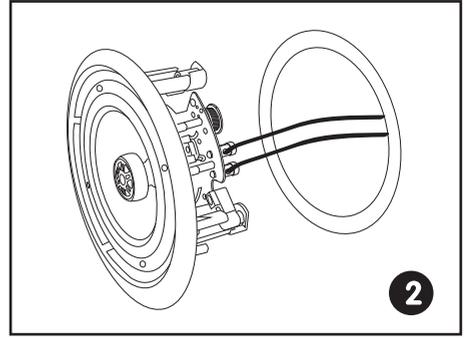


Connect the speaker wires to the speaker.

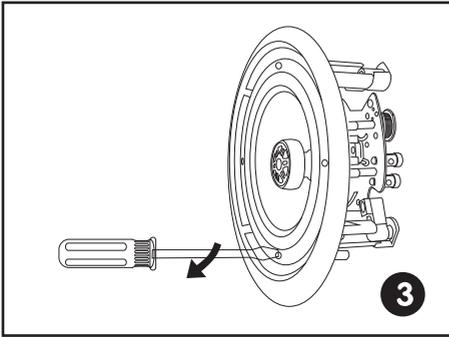

Screw down each of the four Phillips head screws. The locking tabs will swivel into place and secure the unit to the rear surface of the drywall. Put in the strips of adhesive to secure the grille.

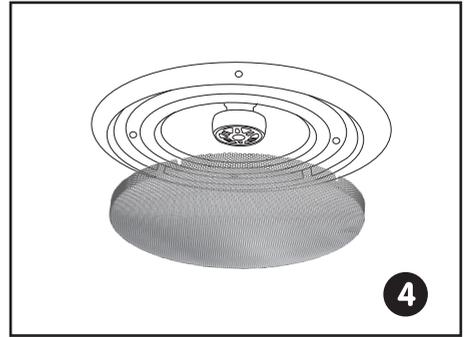

Replace the metal grille.

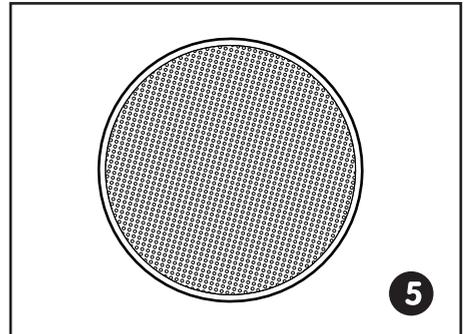

Complete