

PLUG-IN
POWER

SereneLife
by **PYLE**



SLSPGN20

Portable Power Generator

Rechargeable Battery Pack Power Supply
Solar Panel Compatible (42,000mAh Capacity)

ATTENTION:

This product user manual is universal for portable powerpack AC output. AC Output: 110V/60Hz, 100W, Modified SineWave Output. Please refer to the actual product specification before you use the product.

ABOUT THE UNIT

In case of power failure and you need to charge while travelling, you can temporarily charge your electrical or digital products with this unit. This unit has built in high quality lithium-ion battery that supports DC and AC output. It can also be used as emergency light. Before using this unit, please read the user manual carefully and properly keep for reference.

ATTENTION!

This manual will help you to use the product correctly. It does not represent any description on the hardware and software configuration of the product. About the product configuration, please refer to the contract related to this product (if there is), or consult the seller that provides the product. Pictures in this manual is for reference use only, if there are individual pictures that do not match the actual, please prevail in actual products.

The unit provides Modified Sine Wave output


The unit provides Modified Sine Wave output, and can be compatible to AC electric appliance that works with Sinusoidal waveform (power <100W). However, anything that uses an AC motor isn't going to work to full capacity on a modified sine wave such as electrical fan. It will even make the electric appliance make some noise. Appliances like refrigerators, microwaves, and compressors that uses AC motors and some delicate medical equipment will be better off with a pure sine wave inverter. ***This product is only used for emergency, it cannot replace the normal alternating current for long-term use. Please adapt the power station specification required by electrical appliances.***

PRODUCT PARAMETERS


Capacity	42000mAh, 3.7V /155Wh
Dimensions (LWH)	7.67" x 3.54" x 6.73" -inches
Weight	3.48 lbs.
Input Recharging	DC13~22V/2.1A Max
Fully Charged Time	DC 15V/2A: 7~8 hours
Output	3 x USB 5V-2.1A(Max), DC 9-12.6V/10A(15A Max)
DC Wattage (MAX)	9~12.6V/10A (15A, 180W Max)
AC Output	110V/60Hz, 100W, Modified SineWave Output
Bulb Type	Ultra bright LED Flashlight
Power Indicator	LED Indicators
Operation temperature range	14°F to 104°F
Lifecycle	>500 times

PRODUCT DESCRIPTION


【Front】

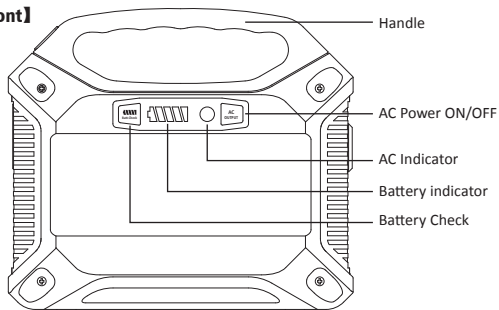

[Right]



[Left]

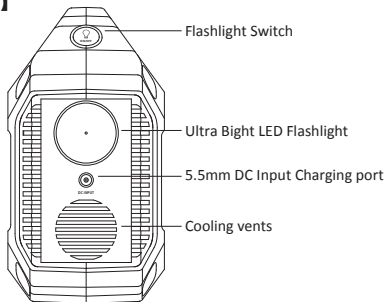

ATTENTION! AC Outlets, AC Output voltage and frequency will be different according to different areas. Please refer to the actual product before using.


PRODUCT INSTRUCTION

1. How to provide power for DC12V appliances (such as head lamp, fan, radio) with this product?


- The 5.5mm 12V DC output is plug and play. Plug your appliances to the DC output port to gain power.

Notices: Please confirm whether your DC 12V appliance supports charging with 5.5mm DC Header Interface (The diameter of the DC Port of the Product is: 5.5mm), otherwise it is unable to connect with the DC output, if so, you can consult the electrical manufacturer, buy the corresponding adapter and connect with it.

[Right]

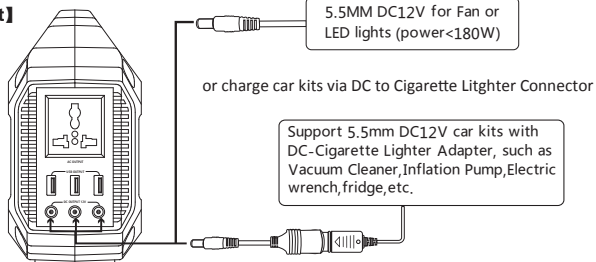

[Right]

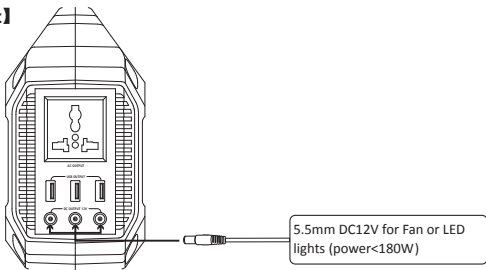

PRODUCT DESCRIPTION

Note: The 12V DC output voltage range is between 9V~12.6V, maximum output current is 15A. DC output voltage drops while battery capacity drops due to chemical characteristics of the battery. If your appliance does not have built-in input voltage stabilizing function, it may shutdown when the input voltage is too low, please unplug your device from the unit and charge the unit in time.


Protection Mode:

Short-circuit/Overpower Protection: If the DC output had a short-circuit or overpowered (-Load(s) power>180W), the unit will shutdown to protect itself. Please clear the problem and recharge the unit to recover from protection mode.

2. How to provide power for AC appliances with this product?

Connect the power cable plug of the electrical appliance to the AC outlet of the product, switch on the power button and the unit will start providing power to your appliances.

[Right]

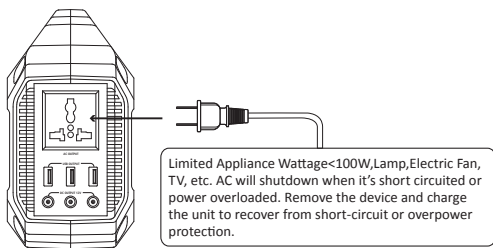

WARNING! The AC outlets, AC voltage and frequency are different according to different countries ; please carefully check whether the product specifications are consistent with the appliance specifications before use, otherwise it can lead to dangerous situations.

Protection Mode:


Short-circuit/Overpower Protection: If the AC output had short circuit or overpowered (-Load(s)power>100W), the unit will shutdown AC output to protect itself. Please clear the problem and re-press the AC button for AC output.

- Some devices, such as refrigerator, ice maker or laser printer may require surge power to start or work during a very time period, the surge power could exceed 100W or even higher, this could cause overpower protection with this unit. Please remove the devices and consult with the device manufacturers for more information. Please clear the problem and re-press the AC button for AC output.
- When the AC port is not in use, turn it off to conserve power.

3. How to provide power for USB digital appliances with this product?

Connect the standard USB cable of digital appliance to the USB output of the unit, press the Battery check button to switch on to gain power.

【Right】

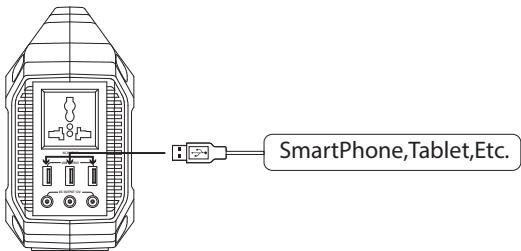

4. How to use the flashlight

This unit is built with an ultra-bright LED flashlight. Single press the flashlight button to switch on: **Flashlight->Blink->Switch off.**


Warning! Do not point directly into human eyes which may cause damage due to the strong light.

5. How to charge the unit?

a. Charge through AC Wall Charger


Using the included AC Wall Charger, plug the unit into any wall outlet to charge the unit. You will know the unit is charging when the blue LED battery indicators are blinking. The unit is fully charged when all battery indicators stop blinking and remain solid. After the unit is fully charged, please remove the AC wall charger in time.

【Left】

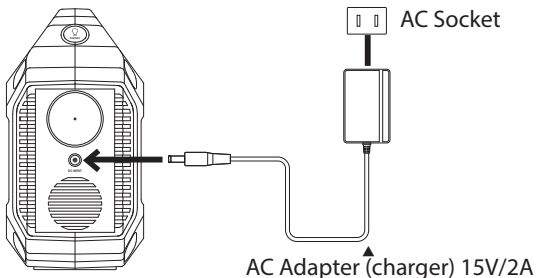

b. Optional Charging Method: Charge through Solar panel

1. Place your solar panel where it will get as much direct sunlight as possible.
2. Plug the output of the solar panel into the input of the unit to start charging. You will know the unit is charging when the blue LED Battery Indicator lights up and blinks. The unit is fully charged when all battery indicators stop blinking and remain solid.

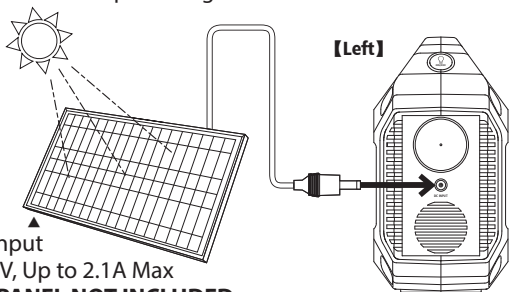

CHARGING PANEL NOT INCLUDED

SUPPORT MPPT TECHNOLOGY

This unit is designed to support charging by solar panel. It's built-in MPPT (Maximum Power Point Tracking) technique, which is designed to use with wind turbines and photovoltaic (PV) solar systems to maximize power extraction under all conditions.

With MPPT technology, the unit can compare the output of the solar panels to the battery voltage. It then figures out what is the best power that the panel can put out to charge the battery and help the unit get maximum AMPS from the solar panels.

- Actual gain can vary widely depending weather, temperature, battery state of charge, and other factors.

c. Charge from your car with a 12V cigarette lighter.

Using the included car charger, plug the unit into a 12V cigarette lighter (car port) of your car. You will know the unit is charging when the blue LED Battery Indicator lights up and blinks. The unit is fully charged when all battery indicators stop blinking and remain solid.

Attention: To avoid car battery power loss. Charging this unit through your car cigarette lighter is only available when your car engine is started.

SECURITY AND MAINTENANCE

- a. Do not short-circuit the unit. To avoid short-circuit, keep the unit away from all metal objects (e.g. coins, hair-pins, keys, etc.).
- b. Do not overheat the unit, or dispose of it in fire, water or other liquids. Keep away from high temperatures. Do not expose the unit to direct sunlight.
- c. Keep away from high humidity, dusty places.
- d. Do not disassemble or reassemble this unit.
- e. Do not drop, place heavy objects on, or allow strong impact to this unit.
- f. This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision

- or instruction concerning use of the appliance by a person responsible for their safety.
- g. Children should be supervised to ensure that they do not play with the appliance.
 - h. Do not cover the device with towels, clothing and other item.
 - i. The unit may become hot when charging. This is normal. Use caution when handling.
 - j. Do not charge the unit over the required time.
 - k. Disconnect the unit when fully charged.
 - l. Use the unit properly to avoid electronic shock.
 - m. Please deal with scrap products in accordance with the regulations, do not treatment the built-in battery as a household garbage, so as not to cause the explosion and pollution.
 - n. The product is only used for emergency power station, it can not replace the standard DC or AC power of household appliances or digital products.

PRODUCT APPLICATION SKILLS

- a. This product is built in high quality original lithium ion battery, it has no memory effect but high-capacity, and it is durable. However, we still recommend you to apply in the range of 50°F~86°F, so as to obtain the optimal charging capacity
- b. When charging, in order to avoid interference, please stay away from TV, radio and other equipment
- c. If the device has not been used for a long time, please disconnect the cable and store it
- d. Some portable devices may need to be set in charge mode to charge, see the corresponding equipment user manual for more information
- e. In order to extend the life of product (lithium battery), it is best to charge within 3 months, and charge at least once within 6 months.
- f. After starting, if there is no any output, it displays to automatically shut down within 3 minutes, so as to achieve better energy-saving effect.

Cold Weather Usage

Cold temperatures (below freezing) can affect the unit's battery capacity due to chemical characteristics of the battery. If you'll be living off-grid in sub-zero conditions, we recommend you keep your unit in an insulated cooler, and connected to a power source (solar panels). The natural heat generated by the unit contained in an insulated cooler will keep battery capacity at its highest.

Recycle

Always return your used electronic products, batteries, and packaging materials to its dedicated collection points. This way you help prevent uncontrolled waste disposal and promote the recycling of materials.

Battery information

Your device has an internal, non-removable, rechargeable battery. Do not attempt to remove the battery, as you may damage the device. The battery can be charged and discharged over 500 times, but it will eventually wear out.

Statement

All rights reserved. Reproduction in whole or in part without written permission is prohibited. All other trademarks are trademarks of their respective owners. Features and specifications are subject to change without notice.

SLSPGN20: Portable Power Generator

Features:

- Compact & Portable Battery Power
- Generator Power Supply for All of Today's Latest Devices
- Works with Smartphones, Tablets, Laptops, Small Appliances
- Ability to Power Multiple Devices, Simultaneously
- Standard 3-Prong Wall Plug Outlet
- (3) USB Device Charge Ports
- Provides Power or Device Charging
- Simple Electric Plug-in Operation
- Battery Level Indicator
- Convenient Travel Design
- Built-in LED Flashlight
- Compatible with Solar Panel Power Generators, Not Included
- Perfect for Outdoor Travel, Beach Visits, Camping, Hiking, Fishing

What's in the Box:

- Portable Power Generator
- Home Wall Power Adapter
- Car / Cigarette Lighter Power Cable
- Vehicle Cigarette Lighter Adapter

Technical Specifications:

- Rechargeable Battery Type: 3.7V Lithium-ion, 42,000mAh
- Battery Power: 155 Wh
- Input Recharging: DC 13 to 22V/2.1A Max
- Charging Time: About ~8 hours
- Bulb Type: Ultra Bright LED Flashlight
- AC Max Load: 120 Watts
- DC Power: 9~12.6V/10A (15A Max)
- Rated Power: 120W, Max 180Watts
- Lifecycle: 500+ Full Charges
- USB Output: (3) 5V/2.1A (Total 6A Max)
- Wall Outlet Connector Types: 3-Prong Plugs (Type B)
- Operation Temperature: 14°F to 104°F (-10°C to 40°C)
- Construction Materials: Engineered ABS
- AC Output: 110V/60Hz, 100W, Modified SineWave Output
- Power Input: 15V/2A DC Power Adapter
- Dimension (L x W x H): 7.67" x 3.54" x 6.73" -inches
- Sold as: 1

SereneLife

by **PYLE**



VISIT US ONLINE:

Have a question?

Need service or repair?

Want to leave a comment?

PyleUSA.com/ContactUs

PYLE