



AQAWBS8BK

Bluetooth Enabled 1200 Watts 8" 4-Way Marine Wake Board Speaker (Black Color)

AQAWBS8WT

Bluetooth Enabled 1200 Watts 8" 4-Way Marine Wake Board Speaker (White Color)


INSTALLATION MANUAL

www.lanzar.com




www.lanzar.com


INSTALLATION INSTRUCTIONS :

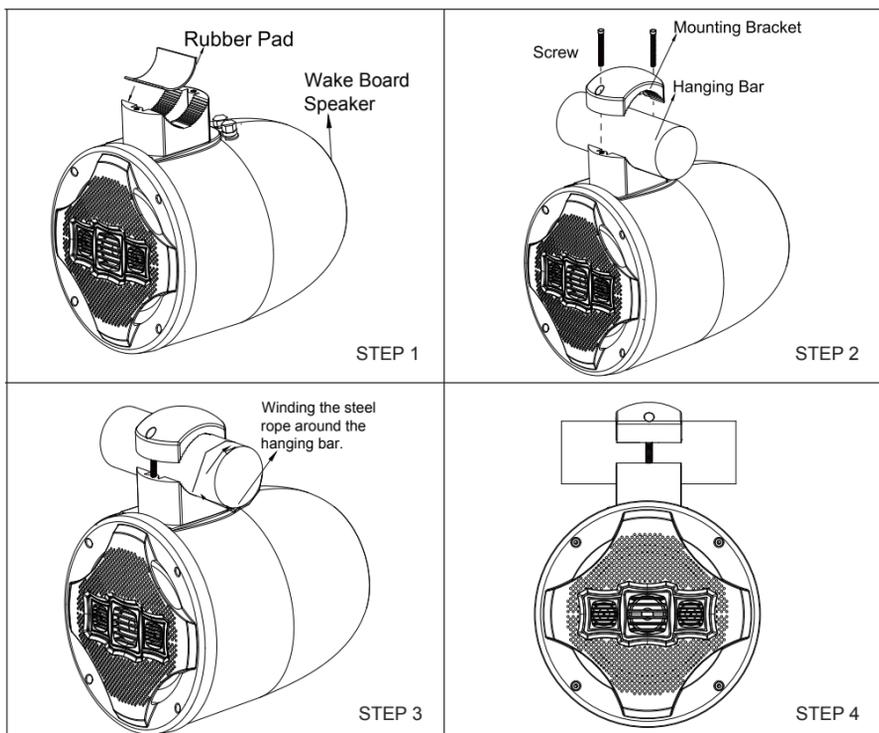

WIRING :

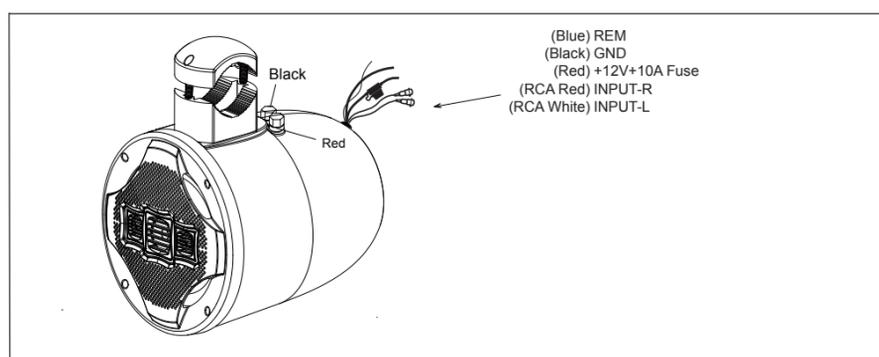

DIMENSIONS :

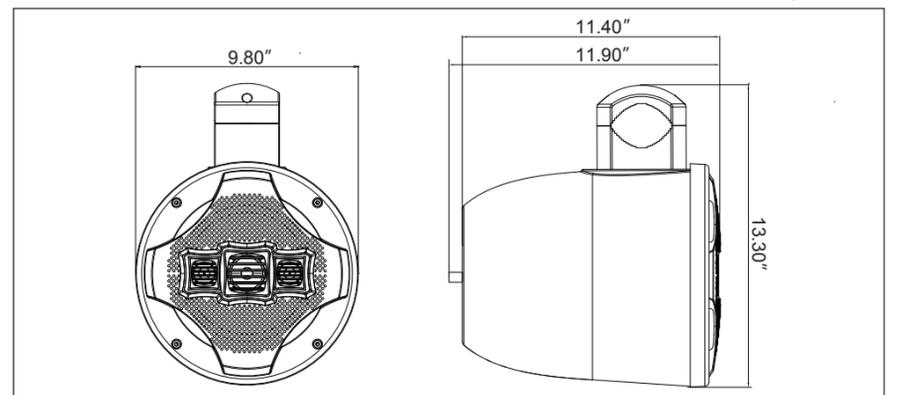

8" Bluetooth Marine Wakeboard Speaker, Water Resistant 4-Way Tower Speaker, 1200 Watt

Features:

Includes (1) Wakeboard Tower Speaker
Water Resistant & Weatherproof Housing
Bluetooth Wireless Music Streaming Ability
4-Way Audio System
Built-in Digital Amplifier
Full Range Stereo Sound Reproduction
Gold-Plated Speaker Plug Terminals
Corrosion and Stain Resistant Coating
Heavy Duty Engineered ABS Cabinet
Reinforced Butyl Rubber Surround
RCA Audio (L/R) Input Connectors
Ability to Stream Audio from External Devices
Excellent for Monitor or Surround Sound Applications
Custom Tooled Design for High Power & Deep Bass Response
Universal Mounting for Support Bar, Tubing, Frame, Roll-Cage
Includes Custom Grill, Installation Hardware

Technical Specs:

1200 Watt Rated Peak Power
8" High Quality Polypropylene Injection Cone
1.5" High Temperature KEISV Voice Coil
2.0" Cone Midrange
0.5" Superior Dome Tweeter / Sub-Tweeter
Tube Mounting Bracket Sizes: 2" ~ 3"
Marine Grade Rating: IP-44
65 Oz. Magnet Structure
Frequency Response: 50-20kHz
4 Ohm Impedance
Sensitivity: 94 dB
Dimensions (L x W x H): 11.9" x 9.8" x 13.3"
(Including Mounting Bracket)
Net Weight: 11.41lbs. (5.175KGS)

Bluetooth Connectivity:

Quick & Easy Wireless Music Streaming
Compatible with All of Today's Latest Devices
(iPhone, Androids, Smartphones, iPad, Tablets, etc.)
Bluetooth Version: 4.0 CSR
Bluetooth Wireless Network: 'Lanzar'
Wireless Range: Up to 30'+ ft.

BLUETOOTH PAIRING AND CONNECTION:

1. Power on the Speaker.
2. Ensure Bluetooth ability is activated and powered ON within your device. Then search for the speaker from your Bluetooth-enabled device. The speaker's Bluetooth Network Name will appear as 'LANZAR' (No password is required for connecting).
3. If paired successfully, your device will save and remember the 'LANZAR' Bluetooth speaker connection (If your device goes out of range and disconnects from the speaker, the unit will automatically re-connect once back in compatible range).
4. Bluetooth is the priority input mode. If you wish to stream audio via the LINE-IN connection, you must disconnect / 'un-pair' the Bluetooth connection.