

## MANUFACTURER'S LIMITED ONE YEAR WARRANTY

**PYLE USA** warrants this unit to be free from defective material or workmanship and will repair or replace this unit or any part thereof if it proves defective in normal use or service within one (1) years from the date of original purchase.

Our obligation under this warranty is limited to the repairing or replacing at our discretion, the defective instrument or any part thereof when it is returned, transportation prepaid to the Pyle Service Center at the address below. This warranty will be considered void if the unit has been tampered with, improperly serviced, subjected to abuse or misuse or if installed in a commercial vehicle. This warranty does not cover accidental damage. When returning this unit for service, please include \$15.00 for return postage and handling.

Send your unit to:

**PYLE SERVICE CENTER**  
**1600-63rd Street**  
**Brooklyn, New York 11204 USA**

**IMPORTANT:** Pack carefully in original carton if possible. We are not responsible for damage incurred in returning items for repair. A letter stating your exact street address, daytime phone number and the problem you are experiencing should be included. You must also enclose a copy of the original receipt as proof of date of purchase.



## SPECIFICATIONS

PDPC52

PDPC62



PDPC82

PDPC5T  
 PDPC6T  
 PDPC8T



WWW.PYLEUSA.COM

## About Pyle Series CEILING SPEAKER

Congratulations ! You have purchased one of our high quality Pyle SPEAKER. After the numerous testing and investigate by our professional engineers, Pyle Series SPEAKER not only is in unique design, but also could deliver consistent and high performance.

The General Features of Pyle Series SPEAKER Include :

**PDPC52**  
 5-1/4" Midbass Speaker  
 1" High Temperature Voice Coil  
 Directable 1" Polymer Dome Tweeter  
 150 Watts Rated Peak Power  
 Frequency Response: 80Hz-20KHz  
 4-8 Ohm Impedance  
 Cut-out Dimensions: 7 2/25" (Diameter) x 4 4/5" (Depth)

**PDPC62**  
 5" Long Throw Woofer  
 1.0" High Temperature Voice Coil  
 1.0" Mylar Dome Tweeter  
 200 Watts Rated Peak Power  
 Frequency Response: 70Hz-20KHz  
 8 Ohm Impedance  
 70V Transformer Tapping at: 8 Ohm, 0.25W, 0.5W, 1W, 2.5W, 5W, 7.5W, 15W, 30W  
 Vented Design for High Power and Deep Bass Response  
 Cut-out Dimensions: 11 2/25" (Diameter) x 5 18/25" (Depth)


**PDPC82**  
 8" Midbass Speaker  
 1" High Temperature Voice Coil  
 Directable 1" Polymer Dome Tweeter  
 250 Watts Rated Peak Power  
 Frequency Response: 70Hz-20KHz  
 4-8 Ohm Impedance  
 Cut-out Dimensions: 7 17/25" (Diameter) x 5 18/25" (Depth)

**PDPC8T**  
 8" Long Throw Woofer  
 1.0" High Temperature Voice Coil  
 1.0" Mylar Dome Tweeter  
 300 Watts Rated Peak Power  
 Frequency Response: 50Hz-20KHz  
 8 Ohm Impedance  
 70V Transformer Tapping at: 8 Ohm, 0.25W, 0.5W, 1W, 2.5W, 5W, 7.5W, 15W, 30W  
 Vented Design for High Power and Deep Bass Response  
 Cut-out Dimensions: 11 2/25" (Diameter) x 5 18/25" (Depth)


**PDPC62**  
 6-1/2" Midbass Speaker  
 1" High Temperature Voice Coil  
 Directable 1" Polymer Dome Tweeter  
 200 Watts Rated Peak Power  
 Frequency Response: 50Hz-20KHz  
 4-8 Ohm Impedance  
 Cut-out Dimensions: 8 7/25" (Diameter) x 5 18/25" (Depth)

**PDPC6T**  
 6.5" Long Throw Woofer  
 1.0" High Temperature Voice Coil  
 1.0" Mylar Dome Tweeter  
 250 Watts Rated Peak Power  
 Frequency Response: 60Hz-20KHz  
 8 Ohm Impedance  
 70V Transformer Tapping at: 8 Ohm, 0.25W, 0.5W, 1W, 2.5W, 5W, 7.5W, 15W, 30W  
 Vented Design for High Power and Deep Bass Response  
 Cut-out Dimensions: 9 12/25" (Diameter) x 5 18/25" (Depth)

We do confident that Pyle Series SPEAKER will bring you many hours of enjoyment over the years .

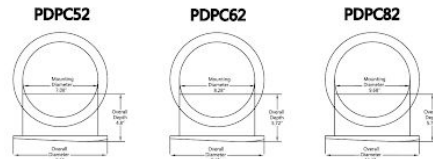

MODEL NO.	PDPC52	PDPC62	PDPC82
WOOFER	1x5"	1x6.5"	1x8"
IMPEDANCE	4-8 OHM	4-8 OHM	4-8 OHM
VOICE COIL	1.0"	1.0"	1.0"
RESPONSE	80-20K HZ	70-20K HZ	50-20K HZ
SPL(DB)	89	89	89
PEAK POWER	150 WATTS	200 WATTS	250 WATTS

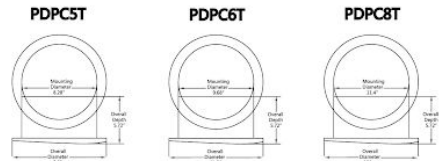

MODEL NO.	PDPC5T	PDPC6T	PDPC8T
WOOFER	1x5"	1x6.5"	1x8"
IMPEDANCE	8 OHM	8 OHM	8 OHM
VOICE COIL	1.0"	1.0"	1.0"
RESPONSE	70-20K HZ	60-20K HZ	50-20K HZ
SPL(DB)	89	89	89
PEAK POWER	200 WATTS	250 WATTS	300 WATTS

PYLE continually strives to improve the performance and value of its products-All specifications are subject to change .

PDPC52/62/82/5T/6T/8T说明书/143\*210mm/80g双铜/新版