



PYLE

PyleUSA.com



PHLHA54

Digital Hearing Aid

2 Channel Universal Fit, Behind the Ear (BTE)

Rechargeable Hearing Amplifier



USER MANUAL

KNOW YOUR DEVICE

Long press: ON/OFF Switch
Short press: Change mode



**Volume
Increase**

**Volume
Decrease**

- Middle power BTE
- 2 Channels WDRC Multi Memories Amplifier
- Noise Reduction
- Memory Switch
- Rocker Volume Control
- Volume and memory Resume
- Exchangeable between ear hook and tube
- **Full Charging Time:** 2 hours
- **Duration of use:** More than 20 Hours of use.
- **Cycle times:** No decline within 500 times charging

Three Step Charge



The device will be turned OFF automatically for faster charging time.

It's recommended that you turn off the hearing

instrument when it's not in use. Long press the memory switch button to turn ON the device if you want to use the device.



Charging



Fully Charged

USB CHARGING

Easy Various Charging Methods



The computer



Power source



Car charger



Power bank



Replacing the ear tube

1



1 apparatus for audible signal amplification

2




1 tube

3



3 eartips: "bell"

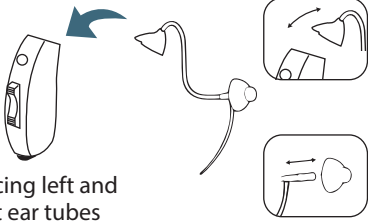

Replacing left and right ear tubes

Note:

1. It is forbidden for patients with tympanitis or ear pyogenesis to use the Digital Hearing Aid.
2. **DO NOT** use it at a high volume for a long time. Otherwise it might injure your ear. If you feel uncomfortable, please stop using.

3. Protect the device from impact, humidity, dirt, marked temperature fluctuations and direct sunlight

PHLHA54

Digital Hearing Aid

2 Channel Universal Fit, Behind the Ear (BTE)
Rechargeable Hearing Amplifier

Features:

- Digital Hearing Amplifier
- Universal Fit Behind The Ear
- Built-in Rechargeable Lithium Battery
- Interchangeable Ear Tip to Seal Out the Noise
- Selectable Listening Modes:
Normal and Noisy
- Unique Ergonomic Design to Prevent Occlusion Effect
- Active Noise Reduction
- Over Discharge/Charge Feature
- Wider Dynamic Range Compression

What's in the Box:

- (3) Pairs Ear Tips – (2) Medium, (1) Large
- (2) Ear Tube
- USB Charging Cable
- Manual

Technical Specs:

- Construction Material: ABS
- Input Noise: $\leq 28\text{dB}$
- Sensitivity: $\geq 43\text{dB}$
- THD: 5%
- Max Sound Output: $125 \pm 5\text{dB}$
- Frequency Range: 250-5000Hz
- Wider Dynamic Range Compression
- Power Supply: 3.7-5V
- Working Voltage: D.C. 1.45V
- Working Current: $\leq 3.5\text{mA}$
- Built-in Rechargeable Battery: Lithium-ion
- Dimensions (L x W x H):
0.83" x 0.55" x 0.71" – inches
- Sold as: 1

PYLE

PyleUSA.com



VISIT US ONLINE:

Have a question?

Need service or repair?

Want to leave a comment?

PyleUSA.com/ContactUs

PYLE