

# PYLE

PyleUSA.com



*PS65ACT*

3 x 6.5" Wireless BT Combo Speaker Boxes  
Active & Passive DJ Loud Speakers with RGB Lights,  
USB/SD Card/MP3/FM/RCA/Mic Inputs, LED Screen,  
Wireless Remote Control, for Indoor/Outdoor Use

## USER MANUAL

## WARNING!

**CAUTION: TO REDUCE THE RISK OF ELECTRIC SHOCK,  
DO NOT REMOVE THE COVER OF THIS UNIT.**

**THERE ARE NO USER - SERVICEABLE PARTS INSIDE.  
REFER ALL SERVICING TO A QUALIFIED TECHNICIAN.**



The lightning flash with arrow head symbol within an equilateral triangle is intended to alert the user to the presence of "dangerous" voltage within the product's enclosure that may be of sufficient magnitude to constitute a risk of Electric shock to humans. Users should exhibit extra safety when this symbol appears in this instruction manual and follow all precautions as they are stated.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in this manual.


### **SAFETY INSTRUCTION**

1. Please read the user manual carefully before use and retain for future reference.
2. The power supply must match the demand of the device with reliable ground wire.
3. All covering signal should be complied with the demand of device.
4. The device should be located far away from high temperature, moisture and powerful electromagnetic field.
5. Max operating temperature is 113°F.
6. No naked flame sources, such as lighted candles, shall be placed on the product.
7. **Clean only with dry cloth** – The appliance should be cleaned only as recommended by the manufacturer.
8. When not in use, unplug the unit from the mains.
9. **To establish a safe level:**
  - Start your volume control at a low setting.
  - Slowly increase the sound until you can hear it comfortably and clearly, and without distortion.
10. Only use suitable means of transportation if you want to move the speaker.

## Note:

- Once the WIRELESS BT devices are paired, there is no need to pair them again.
- If the speaker is connected via BT device but does not play with sound, please turn off nearby devices and only leave one device to re-connect with the speaker.
- When inserting the USB/SD Card, make sure the direction you selected is correct. Never insert violently to avoid damaging the USB/SD Card or the unit. If it doesn't work, please check if the direction is correct.
- Turn off and pull out the USB/SD before turning off the speaker.

## CONTROLS AND CONNECTIONS

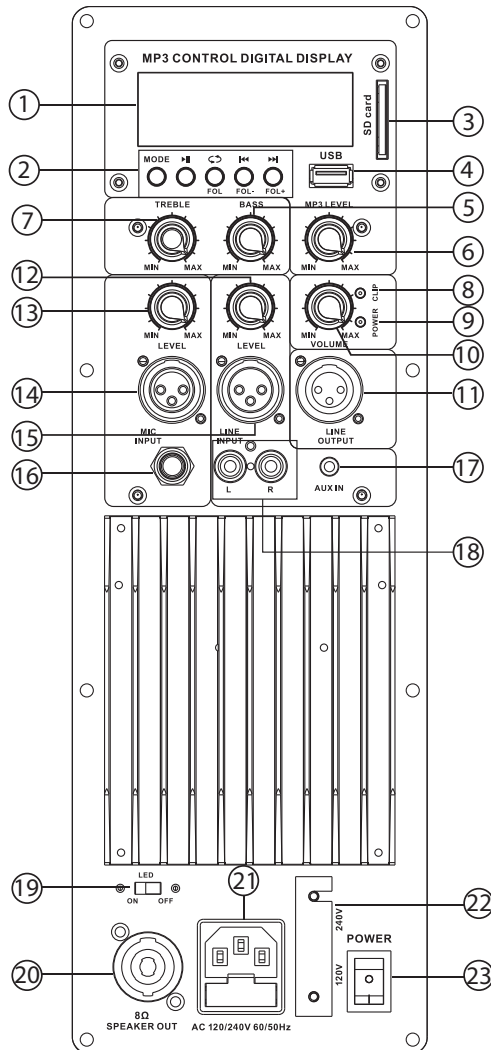

1. LCD screen
2. MP3 Control
  - MODE: USB/SD/BT/FM converter
  - ▶|| : Play/Pause
  - FOL: Long press 3 seconds to enter the folder option function mode  
(press the previous/next songs button to choose the folder)
  - ↻ : Repeat one/Repeat all/Random
  - ◀◀ : Previous Song - Press and hold for fast rewind
  - ▶▶ : Next Song - Press and hold for fast forward
3. SD card input
4. USB input
5. Bass control for low frequencies
6. MP3 level control
7. Treble control for high frequencies
8. Clip LED indicator
9. Power LED indicator
10. Volume control
11. XLR line output
12. Line input level control
13. Mic input level control
14. XLR microphone input
15. XLR line input
16. 6.35mm microphone input
17. 3.5mm line input
18. RCA phone (R+L) line input
19. LED switch(ON/OFF)
20. Speaker out 8 Ohm
21. Fused IEC mains inlet
22. 120V/240V switch
23. Main power switch

### ***Wireless BT Connectivity:***

- Wireless Music Streaming Ability
- Quick & Hassle-Free Device Pairing
- Works with All of Your Favorite Wireless BT-Enabled Devices  
(Smartphones, Tablets, Laptops, Computers, etc.)
- Wireless BT Network Name: **'PYLE SPEAKER'**
- Wireless BT Version: 4.1

## **Features:**

- 3-Way Active Sound Speaker System with Built-in Amplifier
- Built-in Wireless Bluetooth Streaming
- USB/SD Card/FM Radio/RCA/Microphone Inputs
- Colorful Dual LED Flashing Light with Beating
- Speaker Box with RGB Light and LED Screen
- Portable Handle Speaker
- Adjustable Height of Tripod Stand
- Rubber Pads for Better Stability
- Two Black Heavy-Duty Telescoping Stands
- Adjustable Height Speaker Stands
- A system with Precise Treble, Bass Knob Woofer
- Easy Mobility and Easy Set-up
- Ergonomically Shaped Side Handle for Easy Carrying
- Sturdy and Durable Construction

## **What's in the Box:**

- Combo Speaker System
- Tripod Stands
- Remote Control
- 4 Pins SpeakOn Cable
- 4.9 ft. Power Cable

## **Technical Specs:**

- System: Active 3-way full range
- Woofer: 3 x 6.5"
- Tweeter: 1"
- Power Output: 200W
- Construction Material: Polypropylene
- Frequency Range: 60Hz - 18Khz
- Mic Input Level: <5mV
- Line Input/ Output Level: 250mV
- Connector: XLR/6.35mm/RCA
- Sensitivity: 92db
- Impedance: 8 Ohm
- Voltage: 120V/240V
- Tripod Stands Height without Speakers: 28.7" x 55" -inches
- Power Cable Length: 4.9 ft.
- Adjustable Height with Stands: 4.5ft to 5.5 ft
- Tripod Stand Weight Capacity: 66lbs
- Battery Operated Remote Control Requires, 3V Lithium Cell (CR2025)
- Speaker Dimensions (L x W x H): 16.9" x 10.6" x 32.3" -inches

# PYLE

PyleUSA.com



**VISIT US ONLINE:**

*Have a question?*

*Need service or repair?*

*Want to leave a comment?*

[PyleUSA.com/ContactUs](http://PyleUSA.com/ContactUs)

PYLE

**Questions? Issues?**

We are here to help!

Phone: (1) 718-535-1800

Email: [support@pyleusa.com](mailto:support@pyleusa.com)