


# PYLE®

# PLMD1


# FM MODULATOR WIRELESS 2 CH USER'S GUIDE

MODEL NUMBER: PLMD1

## 1. Presentation of the FM modulator

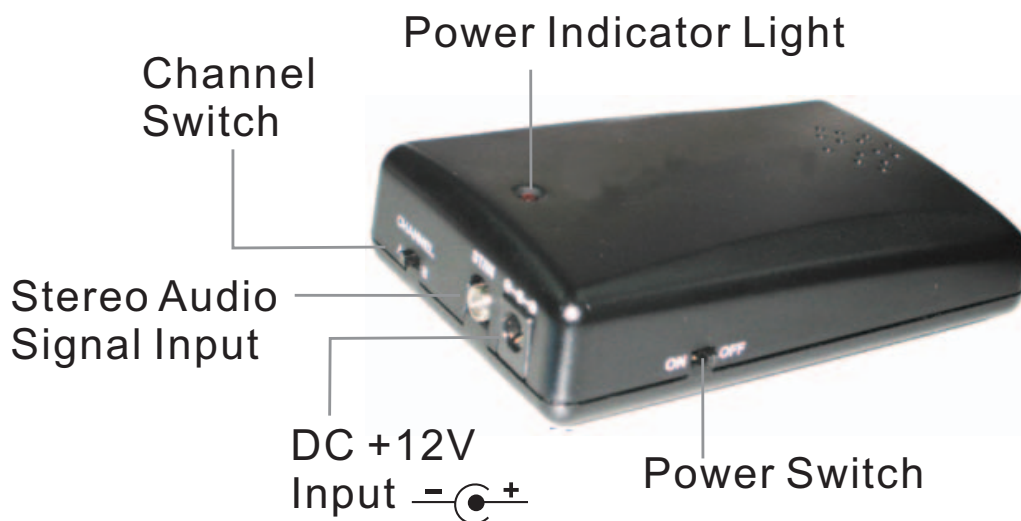

## 2. Installation

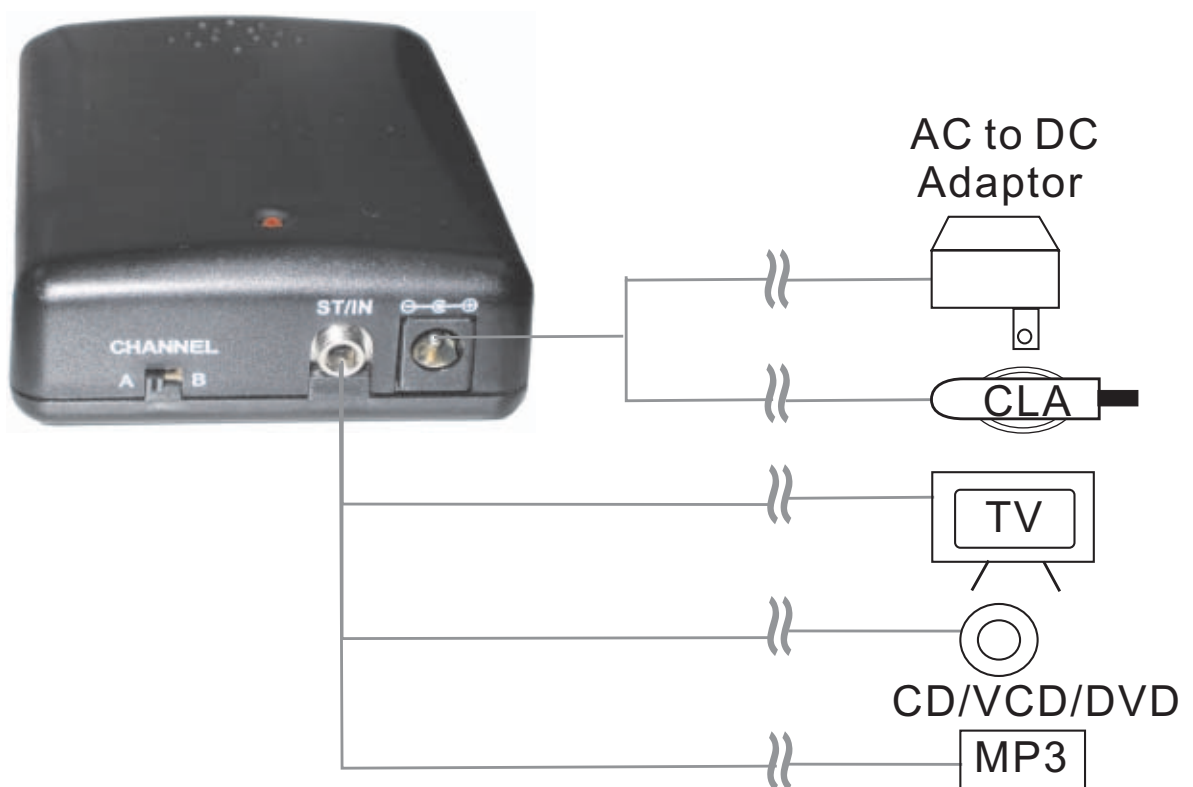

# PYLE®

# PLMD1

# FM MODULATOR WIRELESS 2 CH USER'S GUIDE

MODEL NUMBER: PLMD1

## 3. Using the FM modulator

- Connect the power supply plug to the FM modulator DC+12V input, see the picture (NOTE! The center is positive power source).
- Connect the stereo audio plug to the FM modulator stereo audio signal input, see the picture.
- Turning the power switch to "ON" position, and the power indicator will show red light.
- Select the channel switch, CH A is FM88.7MHz, CH B is FM89.1 MHz. (You can either select no interference or select superior receiving band)
- Turning the FM radio's tuner to the same as channel selected of FM modulator, then can receive audio signal.

## 4. Troubleshooting

### Power indicator light not indicate

- Make sure that the power switch is turned to "ON" position.
- Make sure that the power supply plug is connected to the FM modulator DC jack.
- Make sure you are providing the power supply with the correct voltage.

### No audio signal

- Make sure that the power indicator is normal working, if not, see the "power indicator light not indicate"
- Make sure that the stereo audio plug is connected to the FM modulator audio phone jack.
- Change the stereo audio wire.

FCC ID: QTQOOMRU201

**This device complies with Part 15 of the FCC Rules.**

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

**CAUTION:** Changes or modifications not expressly approved by the party responsible for compliance could void the use's authority to operate the equipment.