

Dual Marine Wakeboard Water Resistant Speaker

Dual 2-Way Mini Box Speaker System with Built-in LED Lights

PYLE
PyleUSA.com

USER GUIDE



Model: PLMRWK61WT, PLMRWK61BK

6.5" -inch Speaker Box Pairs with Built-in LED Lights

Model: PLMRWK81WT, PLMRWK81BK

8" -inch Speaker Box Pairs with Built-in LED Lights

Model: PLMRWKBT62WT, PLMRWKBT62BK

6.5" -inch Speaker Box Pairs with Built-in LED Lights and Wireless BT

Model: PLMRWKBT82WT, PLMRWKBT82BK

8" -inch Speaker Box Pairs with Built-in LED Lights and Wireless BT

Questions? Issues?

We are here to help!

Phone: (1) 718-535-1800

Email: support@pyleusa.com

Technical Specs:

Model Number	Peak Power	RMS Power	Subwoofers Size	Tweeter	Frequency Response	Magnet	Impedance	Sensitivity	Dimensions HxWxD(mm)	Colour
PLMRWK61WT	2x200 W	2x100 W	6.5"	1.0"	60-20 kHz	10 Oz	4 Ohm	90 dB	283x480x240	White
PLMRWK61BK	2x200 W	2x100 W	6.5"	1.0"	60-20 kHz	10 Oz	4 Ohm	90 dB	283x480x240	Black
PLMRWK81WT	2x300 W	2x150 W	8"	1.0"	40-20 kHz	20 Oz	4 Ohm	91 dB	340x577x290	White
PLMRWK81BK	2x300 W	2x150 W	8"	1.0"	40-20 kHz	20 Oz	4 Ohm	91 dB	340x577x290	Black

Model Number	Peak Power	RMS Power	Subwoofers Size	Tweeter	Frequency Response	Magnet	Impedance	Sensitivity	Dimensions HxWxD(mm)	Colour
PLMRWKBT62WT	2x200 W	2x100 W	6.5"	1.0"	60-20 kHz	10 Oz	4 Ohm	90 dB	283x480x240	White
PLMRWKBT62BK	2x200 W	2x100 W	6.5"	1.0"	60-20 kHz	10 Oz	4 Ohm	90 dB	283x480x240	Black
PLMRWKBT82WT	2x300 W	2x150 W	8"	1.0"	40-20 kHz	20 Oz	4 Ohm	91 dB	340x577x290	White
PLMRWKBT82BK	2x300 W	2x150 W	8"	1.0"	40-20 kHz	20 Oz	4 Ohm	91 dB	340x577x290	Black

Model	PLMRWK61WT	PLMRWK61BK	PLMRWK81WT	PLMRWK81BK	PLMRWKBT62WT	PLMRWKBT62BK	PLMRWKBT82WT	PLMRWKBT82BK
Color	White	Black	White	Black	White	Black	White	Black
Built-in LED Lights	✓	✓	✓	✓	✓	✓	✓	✓
Wireless BT Streaming					✓	✓	✓	✓



VISIT US ONLINE:

Have a question?

Need service or repair?

Want to leave a comment?

PyleUSA.com/ContactUs

PYLE

California Prop 65 Warning


⚠ WARNING:

This product contains Nickel carbonate which is known to the state of California to cause cancer birth defects and other reproductive harm. Do not ingest.


For more info go to: www.P65warnings.ca.gov

Picture 1.

1. The base of the bracket.
2. The connecting base of the bracket, 360° rotation, connect to picture 1.
3. The cover of the bracket is fixed by 4 mounting screws after picture 2 rotates to an angle.

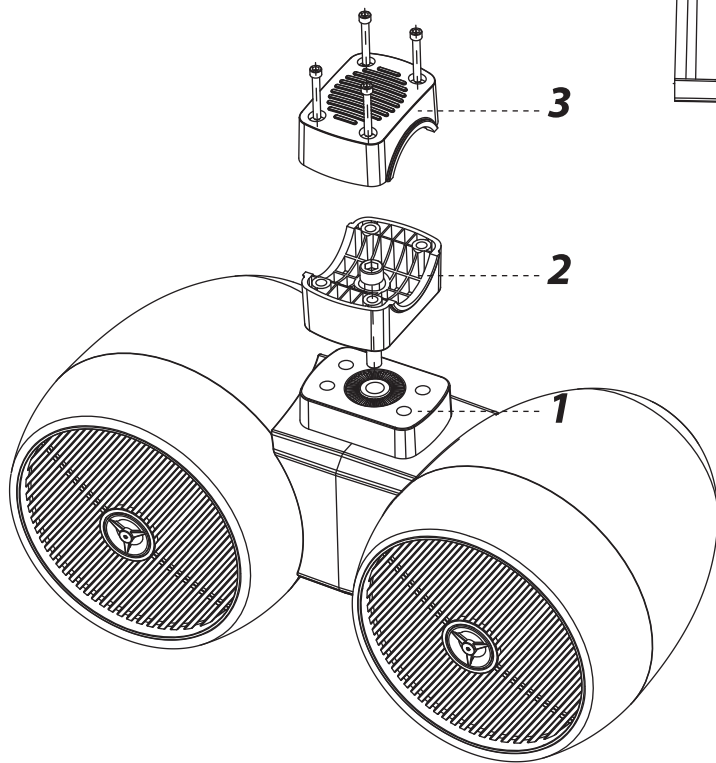


Picture 2.

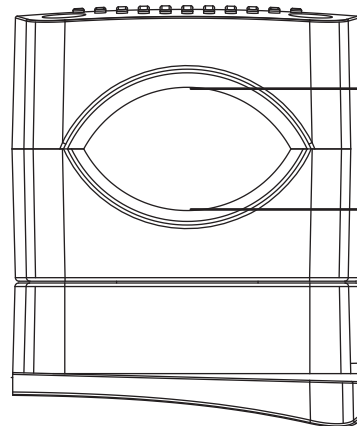

Mounting hole dimension

1 1/3" (3.4cm) → 1 3/4" 2 2/5" (4.45cm/6cm)

360° rotation

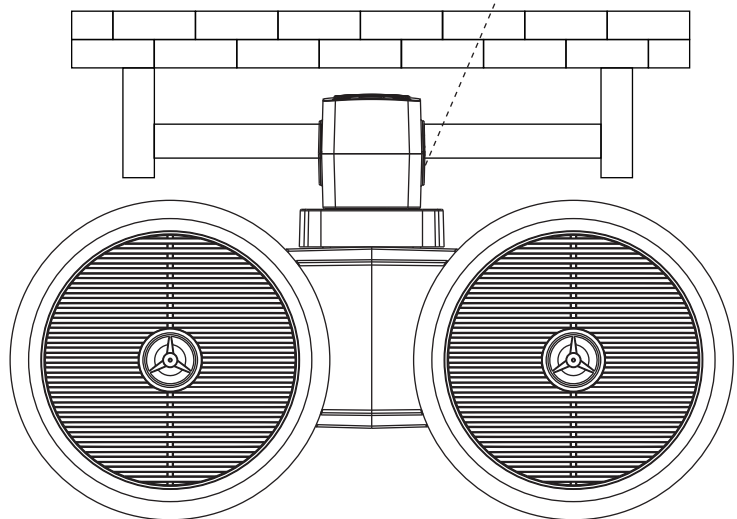

Remark:


Two types of screws for choice: M5x65/M5x80

Picture 3.

PLMRWK61WT/PLMRWK61BK

PLMRWK81WT/PLMRWK81BK

1. Speaker power +(red)
2. Speaker power - (black)
3. LED power + (white) - DC12V
4. LED power - (blue) - DC12V

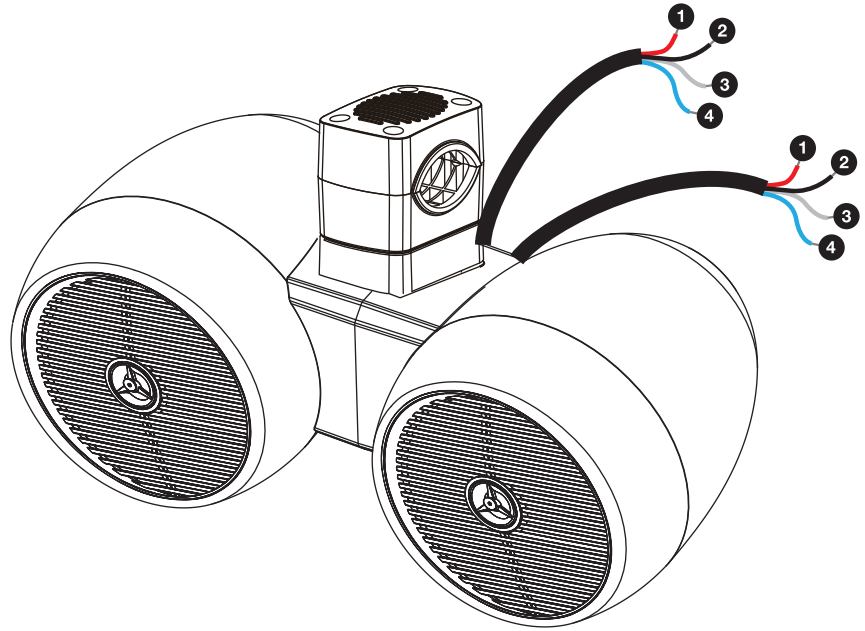


Picture 4.

PLMRWKBT62WT/PLMRWKBT62BK

PLMRWKBT82WT/PLMRWKBT82BK

1. LED power + (Red)
and Wireless BT - DC12V
2. LED power - (Black)
and Wireless BT - DC12V

Wireless BT Connection Diagram

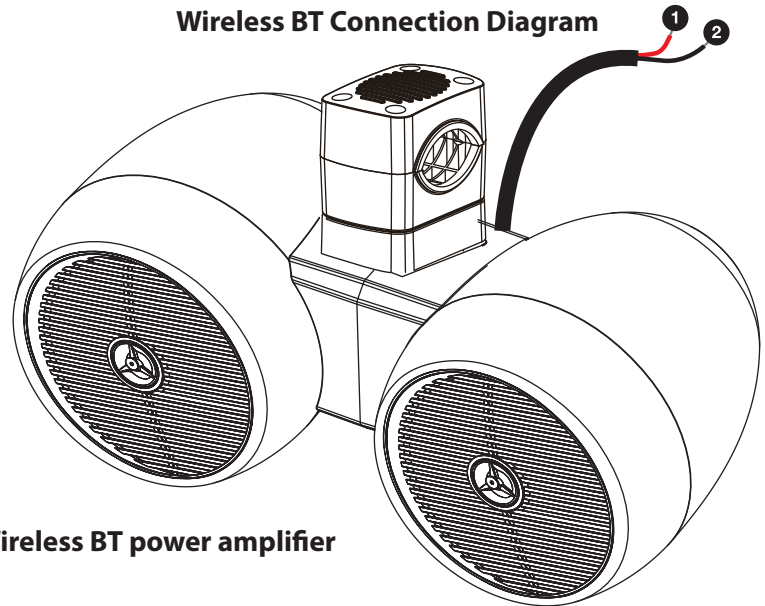

Built in Wireless BT power amplifier