

PLMW63 - PLMW83

Single Voice Coil Car Subwoofer



4-Ohm Car Audio Powered Subwoofer,
Injection Cone with Rubber Edge

PYLE
PyleUSA.com

USER GUIDE

WIRING CONNECTION

Connect the power amplifier to the positive and negative terminals accordingly as shown.

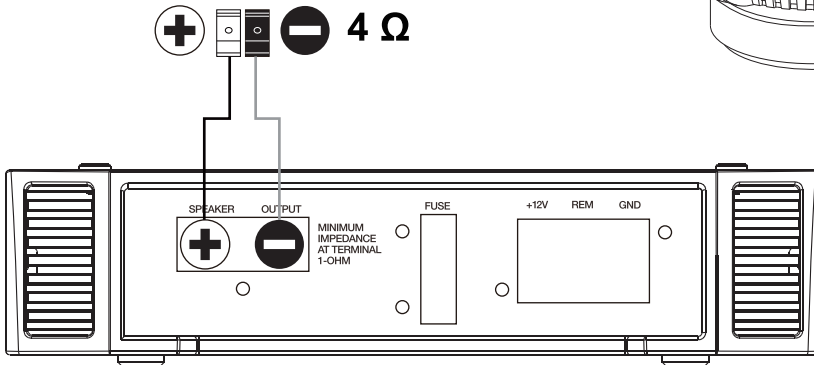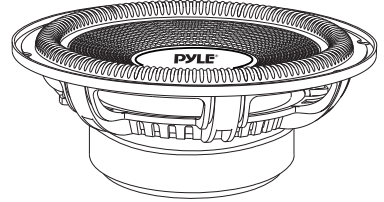

Features:

- Injection Cone with Rubber Edge
- High-Powered Car Subwoofer
- Lab Tested Pro Audio Woofer Performance
- SVC: Single Voice Coil Sub Speaker Design
- Massive Butyl Rubber Surround
- High Strength Engineering Plastic Basket
- Quick Connect Speaker Terminal Plate
- Compatible with Sealed Enclosure Speaker Box Audio Setup
- Impressive Bass Response, Low-Resonance Frequency Output
- Designed for Custom Audio Car, Truck, Mobile Vehicle Applications



What's in the Box:

- SVC Subwoofer

PLMW63

6.5" Single Voice Coil Car Subwoofer

150 Watts at 4-Ohm Car Audio Powered Subwoofer, Injection Cone with Rubber Edge

Technical Specs:

- Construction Materials: Engineered ABS
- Power Handling: 150 Watts MAX 75 Watts RMS
- Impedance: 4 Ohm
- Voice Coil: 1.0" -in
- Voice Coil Type: High-Temp Aluminum
- Magnet Size: 20 Oz
- Magnet Type: Barium Ferrite Magnet
- Frequency Response: 50Hz-5000Hz
- Sensitivity: 91 dB (1w/1m)
- Product Dimensions: 6.6 " x 6.6" x 2.6" –inches

PLMW83

8" Single Voice Coil Car Subwoofer

200 Watts at 4-Ohm Car Audio Powered Subwoofer, Injection Cone with Rubber Edge

Technical Specs:

- Construction Materials: Engineered ABS
- Power Handling: 200 Watts MAX, 100 Watts RMS
- Impedance: 4 Ohm
- Voice Coil: 1.5" -in
- Voice Coil Type: High-Temp Aluminum
- Magnet Size: 25 Oz
- Magnet Type: Barium Ferrite Magnet
- Frequency Response: 40Hz-5000Hz
- Sensitivity: 91 dB (1w/1m)
- Product Dimensions: 8.3 " x 8.3" x 2.9" –inches

California Prop 65 Warning

⚠️ WARNING:

This product contains Nickel carbonate which is known to the state of California to cause cancer birth defects and other reproductive harm. Do not ingest.

For more info go to: www.P65warnings.ca.gov

Questions? Issues?

We are here to help!

Phone: (1) 718-535-1800

Email: support@pyleusa.com