


The plastic corner to connect the metal frame, please take care of the direction the vertical one should be up or down forwards:
The tube must go into the corner as much as possible.

Metal clips use the metal clip to clip the screen on the top bar, so the screen will stay on the top bar then use the zip tie to go through the hole and fix the screen on the top bar. You can remove the clip or still let the clip stay on.

- Pay attention.**
1. Make the bottom triangle firstly, then add three uprights then make the top triangle. When you make the triangle, for the last side, it is a little bit difficult, but it is designed intentionally in order to make the angle to be tensioned and not get loose.
 2. The screen will have some wrinkle due to the rolling up, it will recover after a while when you tension the screen with zip tie.
 3. Please don't cut the zip tie as you may use in next time.
 4. This zip tie can be release again just by pressing the switch.
 5. When you fix all the zip ties, you can tighten the tie a little by a little to make the screen as flat as possible.
 6. You can leave the clip on or remove the clip later, as the clip is a tool helping you to fix the screen in the beginning.
 7. There two pairs of gloves so it's better to have two persons to assemble this screen.
 8. Don't tighten the screen too much otherwise the screen will be torn.
 9. If the screen is dirty, you can clean it with a white cloth, the screen is not suitable for machine wash
 10. The screen can be used in door or outer door but it is not waterproof. You can not display outside the whole year as the black edge around will be damaged in water.
 11. Once you finish using this screen, store the screen in the same way when you take them out. About the stand, you can use the spring strap or the zip tie to wrap them.

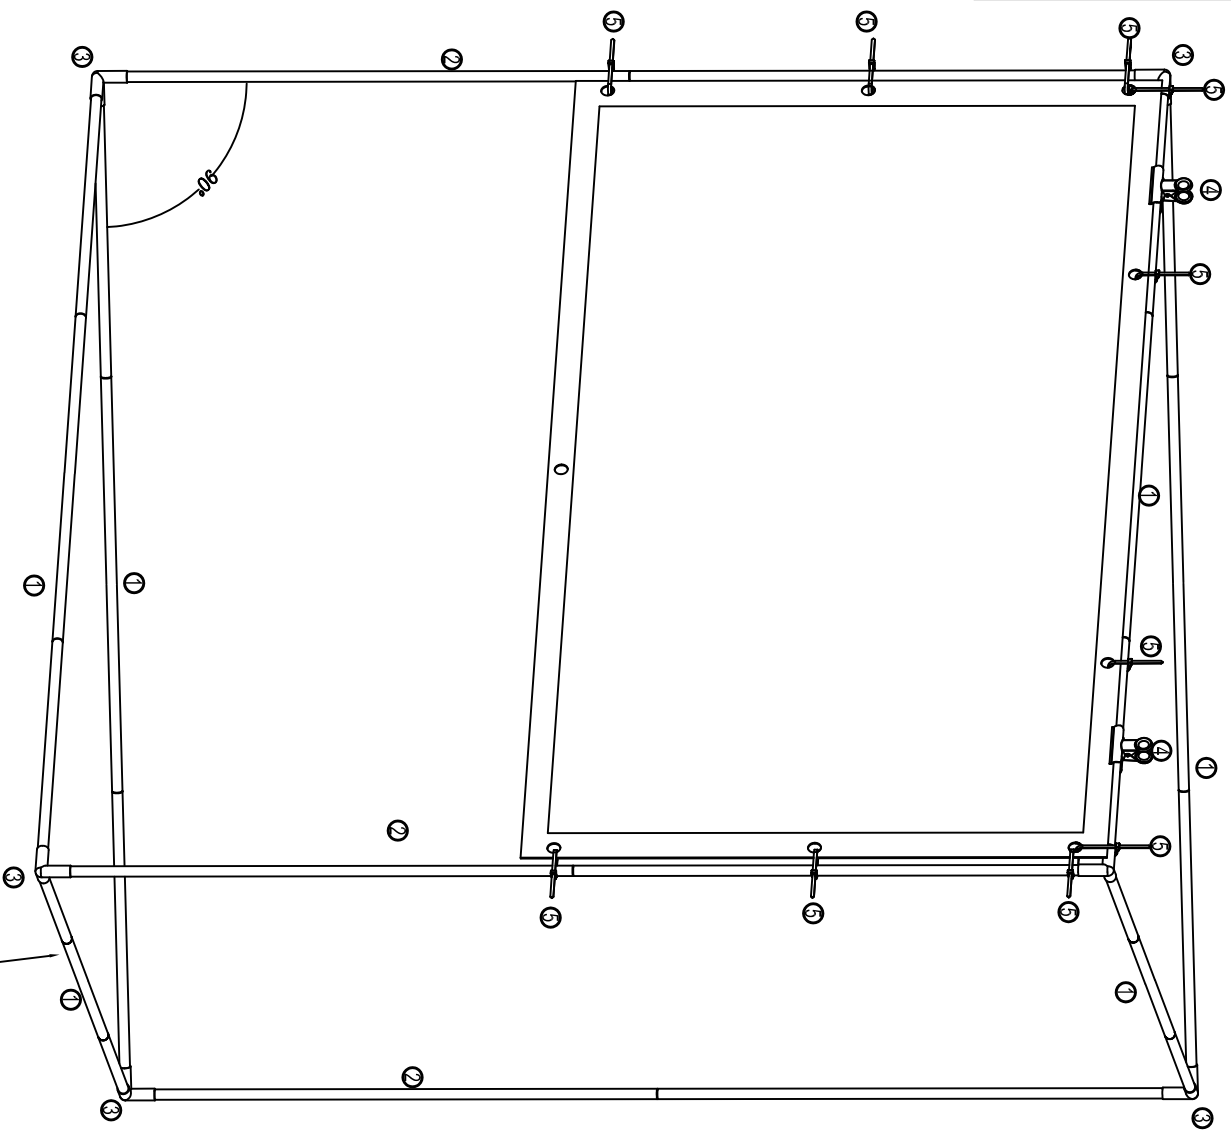

a little bit difficult to put the last side together but it is intentional to make the triangle tight