




USER MANUAL

TITLE : GUITAR AMPLIFIER


MODEL : PVAMP30

www.pyleaudio.com

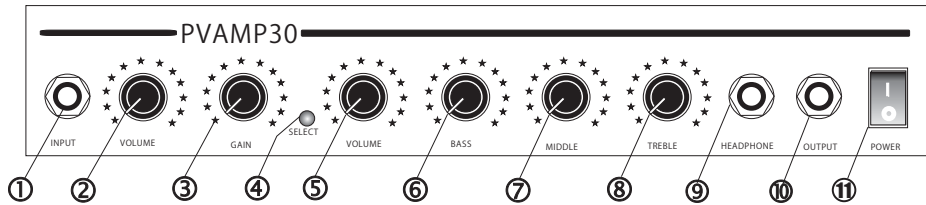

Functions

1. **INPUT** This is an instrument input for plugging in virtually anything.
2. **VOLUME** This is the overall level control for the normal channel.
3. **GAIN** This is the distortion intensity control for the overdrive channel.
4. **SELECT** This switch is select the drive channel or normal channel.
5. **VOLUME** This is the overall level control for the overdrive channel.
6. **BASS** This equalization control adjusts the amount of boost in the low frequency range.
7. **MIDDLE** This equalization control adjusts the amount of boost in the middle frequency range.
8. **TREBLE** This equalization control adjusts the amount of boost in the high frequency range.
9. **OUTPUT** This is a 1/4" jack for hooking up external speakers to the amplifier.
10. **HEADPHONE** This is a 1/4" 3-conductor stereo headphone jack for plugging in headphones.
11. **POWER** This on/off switch provides power the unit.

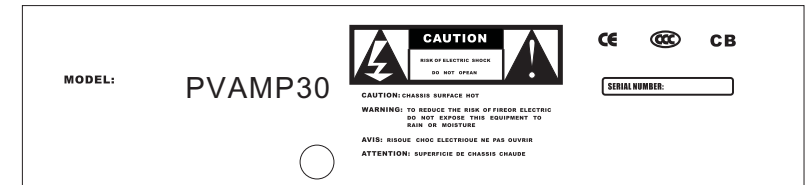

TECHNICAL SPECIFICATIONS

Power	~110V, 60 Hz
Rated Power	45 Watts Peak
Load Impedance	4 Ohms
Speaker	6"
Signal/Noise Ratio	≥ 70dB
Frequency Response	20HZ to 16KHZ
Dimension	13.2*7.7*11.6 (in)
Weight	13.2LBS

CAUTION: CHASSIS SURFACE HOT.
 WARNING: TO REDUCE THE RISK OF FIRE OR
 ELECTRIC SHOCK, DO NOT EXPOSE
 THIS EQUIPMENT TO RAIN OR MOISTURE.
 AVIS: RISQUE DE CHOC ELECTRIQUE NE PAS OUVRIR.
 ATTENTION: SUPERFICIE DE CHASSIS CHAUDE.