



serenelife™



SLGZX9

Foldable 3-Wheel
Golf Push Cart

New Deluxe Scorecard Holder,
Upper & Lower Brackets with Strap

USER MANUAL

WARNING:

- For your own safety, please read and understand these warnings and keep this user guide for future reference.
- Always make sure the cart is fully extended and locked before use. Always make sure the cart is folded and locked properly before lifting or transporting.
- Do not run while using this product.
- Do not use accessories other than those designed for use with your cart.
- Keep all packing materials away from children and recycle where possible or where required by law.

MAINTENANCE

- To clean the trolley, wipe with a soft, dry cloth.
- Car polish may be used to maintain finish.
- Lubricate moving parts every 6 months.


WARNING:

- Keep hands and fingers away from moving or sliding parts!
- Always keep control of the buggy - Do not let it run down hills without full control.




PARTS LIST


- A** Foam
- B** Umbrella Holder Base
- C** Scorecard Holder
- D** Hand Grip
- E** Sliding Lock
- F** Upper Bracket
- G** Joint
- H** Main Frame Tube
- I** Leg Bracket
- J2** Holes Leg Frame
- J1** 3 Holes Leg Frame
- K** Right Wheel Mechanism
- K1** Left Wheel Mechanism
- L** Anti-Splay Wire
- M** Rear Wheel
- N** Lower Bracket
- P** Front Wheel
- Q** Left Weight Stabilizer
- Q1** Right Weight Stabilizer

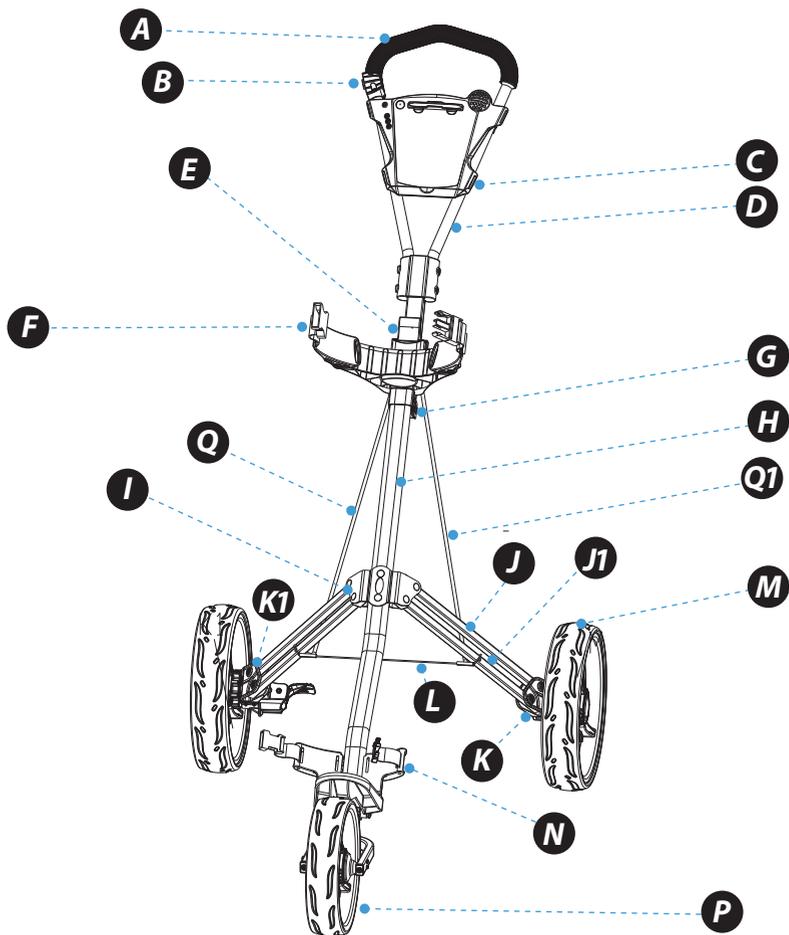


ASSEMBLY DETAILS




Lift the handle to level position as Fig. 1




Move the slide lock down side and lock to upper bracket as Fig. 2

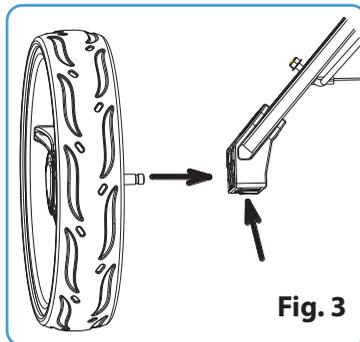


Press the red button on the wheel lock mechanism to assembly rear wheel as Fig. 3

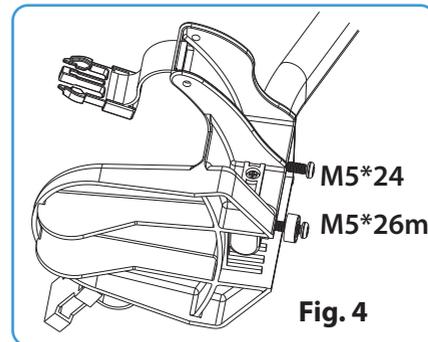


Remove the screws and Plastic piece as Fig. 4.

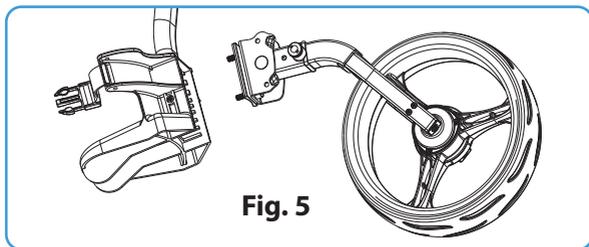


Take out the fixed steel piece from the front wheel package, then going the screws through the holes and keep the "up" toward upper as Fig. 5.

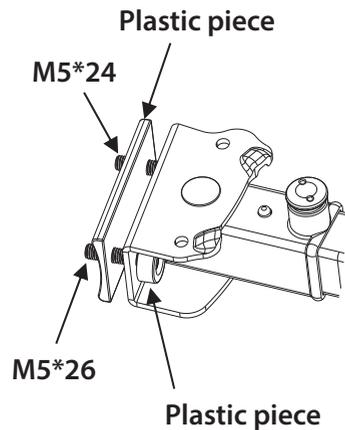



Completely unfolding and assembly as Fig. 6.

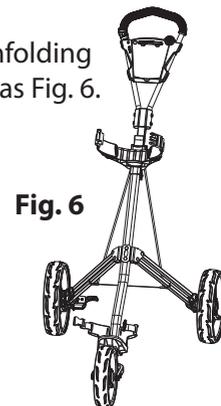

FOLDING STEPS



Press the red button to release the front wheel, then fold until the pin inserts in the hole as Fig. 7 and 8.

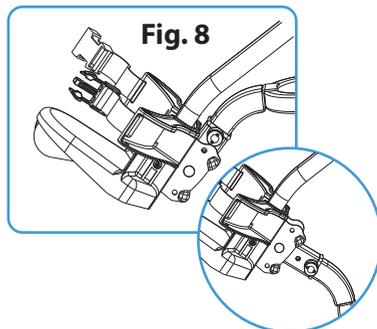

Move the slide lock up to release the handle as Fig. 9






Fig. 10 shows the folded position

SLIDE LOCK MECHANISM




Press the red button and adjust the slide lock to required handle height as Fig. 11



Adjustable handle with 4 positions height as Fig. 12

FOOT BRAKE MECHANISM



When the red brake pedal is engaged, it should work with a gentle downward pressure; If it does not, slightly move the wheels until the braking pin can seat easily. The mechanism should last for years if treated good. Step on the brake pad to activate and pull off to deactivate the brake as Fig. 13

serenelife™



Questions? Issues?

We are here to help!

Phone: (1) 718-535-1800

Email: support@pyleusa.com