

**Start Here**



Serenelifehome.com/  
register

# SereneLife



## ***SLPUMP50*** **Electric SUP Air Pump Compressor**

# ***USER GUIDE***

PLEASE KEEP THIS MANUAL CAREFULLY FOR FUTURE REFERENCE.  
FOR HOUSEHOLD USE ONLY.

TABLE OF CONTENTS

FEATURES AND TECHNICAL SPECS ..... 3

DETAILS OF ACCESSORIES ..... 4

SAFETY INSTRUCTIONS ..... 4

USB CHARGING OUTPUT OPERATION ..... 5

CHARGING VIA CIGARETTE LIGHTER PLUG/ADAPTER ..... 6

INFLATION OPERATION ..... 6

DEFLATION OPERATION ..... 8


PRECAUTIONS ..... 8

TROUBLESHOOTING ..... 9

MAINTENANCE AND STORAGE ..... 9

REGISTER PRODUCT ..... 9

**California Prop 65 Warning**

 **WARNING:**

This product may expose you to chemicals, which is known to the state of California to cause cancer, birth defects and other reproductive harm. Do not ingest.

For more info go to: [www.P65warnings.ca.gov](http://www.P65warnings.ca.gov)

### ***Features:***

- SUP Air Pump Inflator Deflator System
- Smart Inflator Design with Air Pressure Preset
- Ability to Set a Target PSI Pressure Level
- Deflation Mode Quickly Removes Air
- Simple Electric-Plug in Design
- Digital LCD Display Screen
- Touch Button Control Panel
- Adjustable PSI Air Pressure Settings
- Can be Powered via Integrated Car Cigarette Plug Power Cable
- Built-in Rechargeable Battery
- Button Activated LED Flashlight
- Housing Access Lid to Store Power Cable
- Convenient Carry Handle for Portability
- Maneuverable Long Flexible Air Hose
- Used for SUP Stand-Up Paddle-Boards & Backyard Pool Inflatables

### ***What's in the Box:***


- SUP Air Pump Inflator
- Detachable Air Hose
- Wall Power Adapter
- Storage / Travel Bag

### ***Technical Specs:***

- Power Output: 110 Watt
- Selectable Pressure Units: PSI / Bar
- Adjustable Air Pressure: 0-16 PSI (Up to 1.10 Bar)
- Air Hose Length: 3.3 ft.
- Car Cig Power Cable Length: 9.8 ft.
- Charge Time: About 6 Hours
- Rechargeable Battery: 12V LI-ION, 6000mAh
- Power Supply: 120V Wall Power Adapter / DC 12V
- Dimensions (L x W x H): 9.9" x 6.9" x 5.2" -inches

## Details of Accessories

1. Inflation inlet
2. Deflation outlet
3. DC plug
4. Pressure value LCD screen
5. USB 1A, 2A charging output port
6. Charging input port
7. LED light button
8. Pressure unit toggle button
9. ON/OFF button
10. Decompressing button
11. Pressurizing button
12. Hose
13. Air tap
14. Charger
15. DC plug storage place
16. Flexible conduit adaptor
17. LED light

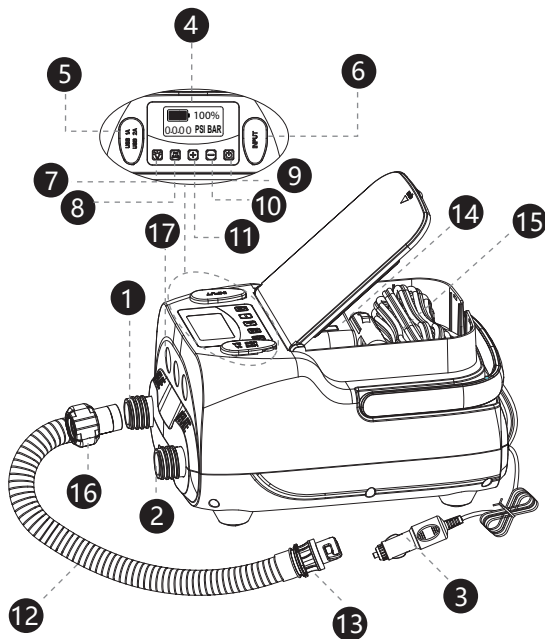


## SAFETY INSTRUCTIONS

- Keep children and incapacitated individuals away from this device.
- Supervise anyone unfamiliar with the device during use.
- Unplug the DC plug before moving, maintaining, repairing, or adjusting the product.
- Avoid placing the wire in soil or areas where it may be damaged.
- Do not operate with damaged cords, have them replaced by authorized service personnel.
- Do not plug or unplug with wet hands or when standing in water.
- Check the maximum pressure limit of your inflatable before use.

- Ensure the car cigarette socket is clean and free of rust for optimal performance.
- Keep the device away from humid environments and direct sunlight.
- Do not expose to extreme temperatures.
- Keep the unit away from flammable or explosive substances.
- Only use compatible power adapters to prevent damage or risk of overload.
- Store in a dry, ventilated location when not in use.
- Do not disassemble. The unit contains no user-serviceable parts.
- Avoid blocking vents or covering the device during use.
- Unplug when not in use.
- If swelling, leakage, or any damage occurs, stop use immediately.
- If battery liquid gets in the eyes, rinse with clean water and seek medical attention if needed.

### ***USB Charging Output Operation***

While on standby or powered on, plug one end of the charging cable into your digital device and the other into the USB 1A or 2A output port of the pump.

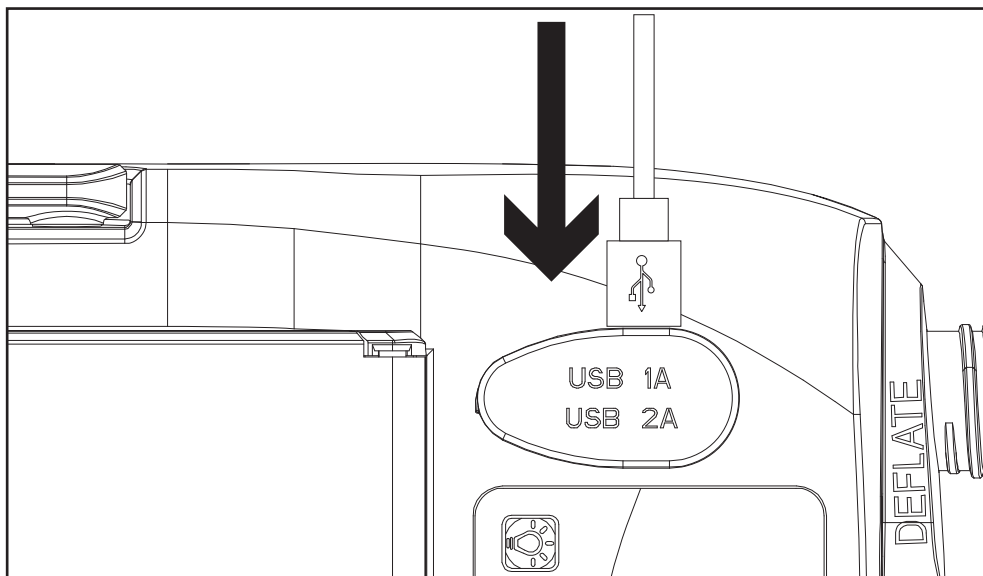

**Figure 1**

## ***Charging via Cigarette Lighter Plug/Adapter***

In standby or power-on mode, connect the cigarette lighter plug into your vehicle's 12V DC socket.

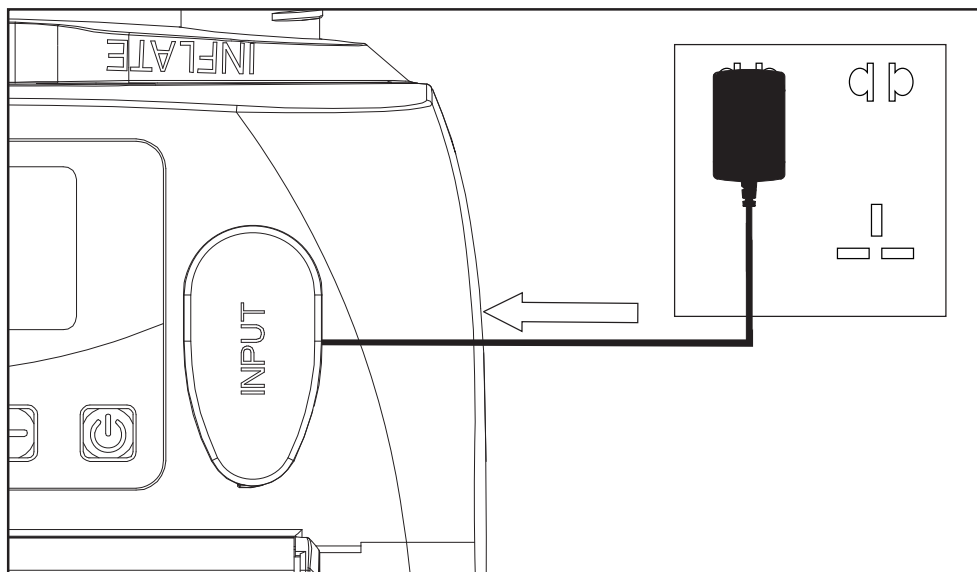


Figure 2

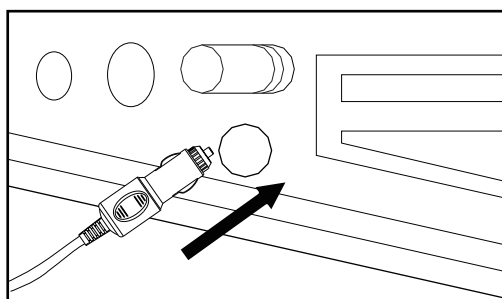



Figure 3

## ***Inflation Operation***

1. Press and hold the ON/OFF button for 3 seconds to enter standby mode.
2. Connect the flexible conduit adapter end of the hose to the inflation inlet and twist clockwise to secure.
3. Attach the other end of the hose to the air nozzle of the inflatable and twist to lock it.

4. Press the unit button  to choose your desired pressure unit.
5. Use the + and – buttons to set your target pressure (range: 0–16 PSI).
6. Press the ON/OFF button to start inflation. You may adjust the pressure value while it's operating.
7. The pump stops automatically when the set pressure is reached.
8. It powers off automatically after 2 minutes of inactivity.
9. Remove the hose and store the device.

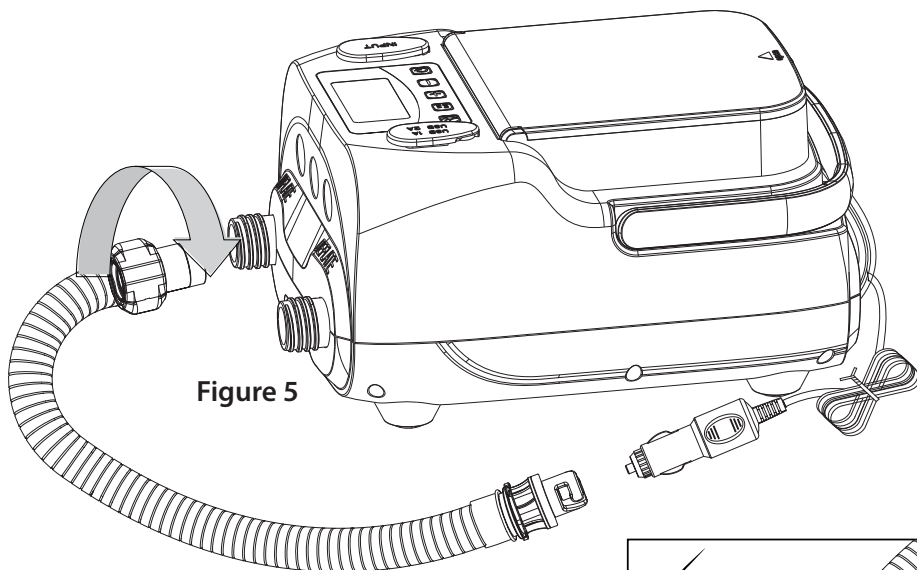


Figure 5

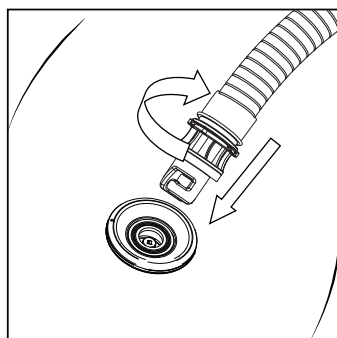


Figure 6

**Note:**

- Factory preset pressure is 10 PSI. On next use, the previous setting will be displayed.
- If idle for 2 minutes, the unit will enter standby. Press the ON/OFF button to reactivate.

## Deflation Operation

1. Remove the hose from the inflation inlet.
2. Attach the hose to the deflation outlet and twist clockwise to tighten.
3. Attach the other end to the inflatable.
4. Press the ON/OFF button to start deflation.
5. Turn off the power once deflation is complete.


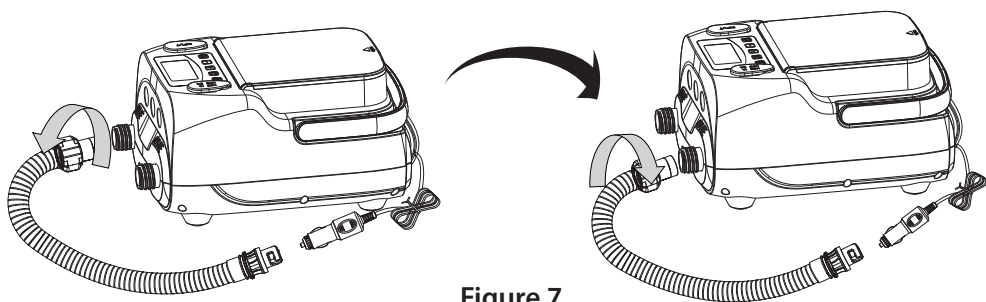


Figure 7

## Precautions

- This product runs on a built-in lithium battery or can be powered via the car cigarette lighter socket.
- Use only a 12V DC power source.
- Keep the inflation inlet and deflation outlet clear and unobstructed.
- Do not use a damaged hose; replace immediately.
- Never remove the hose during inflation—high pressure may cause injury.
- Do not operate continuously for more than 30 minutes.  
Allow a 30-minute cool-down period.
- Never expose the pump to rain or immerse in water.
- Do not point the inflation inlet at your body.
- Do not leave the device unattended while in use.

Figure 8

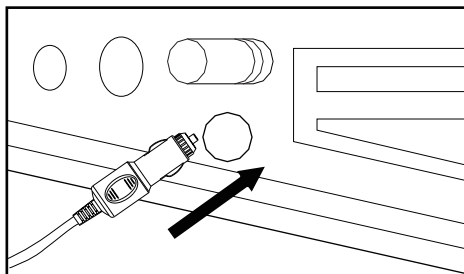



# TROUBLESHOOTING

Fault	Cause	Solutions
The air pump cannot start	<div>1. Power source not connected properly</div> <div>2. Fuse in DC plug is burnt</div> <div>3. Motor overheated or overloaded</div>	<div>1. Make sure the power cord is connected to the 12V socket</div> <div>2. Replace the fuse</div> <div>3. Allow motor to cool and restart</div> <div>4. If unresolved, contact the manufacturer or authorized service provider</div>
Slow or abnormal inflation	<div>1. Hose is blocked or cracked</div> <div>2. Hose not properly connected to pump or air bag</div>	<div>1. Replace or unblock the hose</div> <div>2. Reconnect the hose securely</div> <div>3. If unresolved, contact the manufacturer or authorized service provider</div>

## MAINTENANCE AND STORAGE

- After use or when moving, maintaining, or adjusting the product, unplug the DC plug first.
- Allow the pump to cool before storage.
- Do not expose to rain or immerse in water.
- Store in a dry, ventilated place.

## SUGGESTIONS

*The product warranty is one year. It is recommended to use original accessories only. Any damage caused by non-original accessories is not covered under warranty.*

### Register Product

Thank you for choosing SereneLife. By registering your product, you ensure that you receive the full benefits of our exclusive warranty and personalized customer support. Complete the form to access expert support and to keep your SereneLife purchase in perfect condition.

Start Here



Model Number:  
**SLPUMP50**

[SereneLifeHome.com/pages/register](https://www.SereneLifeHome.com/pages/register)

# SereneLife



***Questions or Comments?***

**We are here to help!**

**Phone: 1.718.535.1800**

**[Serenelifehome.com/ContactUs](http://Serenelifehome.com/ContactUs)**