

Visit Our Website



SCAN ME
PyleUSA.com

PYLE®

PyleUSA.com



PDWR54BTB - PDWR54BTW - PDWR64BTB - PDWR64BTW
Waterproof & Wireless BT
Indoor/Outdoor Speaker System

USER GUIDE

**READ ALL INSTRUCTIONS CAREFULLY BEFORE USING THIS PRODUCT.
RETAIN THIS OWNER'S MANUAL FOR FUTURE REFERENCE.**

Model	Color	Speaker Size	Built-in BT	Marine Grade	MAX Power	RMS Power
PDWR54BTB	Black	5.25"	✓	✓	600	300
PDWR54BTW	White	5.25"	✓	✓	600	300
PDWR64BTB	Black	6.5"	✓	✓	800	400
PDWR64BTW	White	6.5"	✓	✓	800	400

FEATURES:

- System Includes (2) Speakers
- Active & Passive Speaker System
- Built-in 2 Channel Amplifier
- Bluetooth Wireless Music Streaming
- Marine Grade Waterproof Construction
- 2-Way Full Range Stereo Sound
- Custom Tooled Design for High Power and Deep Bass Response
- Removable & Rust Proof Aluminum Speaker Grills
- Gold Plated Speaker Plug Terminals
- RCA (L/R) Audio Input Connector Jacks
- Single RCA Speaker Output Connector Jack
- Rotary Volume Control
- Spring Loaded Mounting Bracket Included
- Heavy Duty Engineered Plastic Cabinet
- Built-in Capacitor Speaker Protection
- Ability to Daisy-Chain Active Speaker to Passive Speaker as Stereo System
- Excellent for Monitor or Surround Sound Applications
- Great by the Pool, on the Patio or in the Boat
- For Indoor / Outdoor Use

WHAT'S IN THE BOX

- 2 Loudspeakers
- 2 Brackets
- 4 Bracket Bolts
- 4 Screws
- 1 Connection Wire
- 1 RCA Wire

BLUETOOTH CONNECTIVITY

- Instantly Stream Music from Your Connected Device
- Works with All of Your Favorite Devices
(iPhone, Android, Smartphone, iPad, Tablet, PC, etc.)
- Bluetooth Version: Bluetooth 5.3
- Bluetooth Network Name: PyleUSA
- Bluetooth Wireless Range: 30'+ Feet

TECHNICAL SPECS:

- Marine Grade IP44 Rating
- 1.0" Polymer Dome Tweeters
- Magnet Size:
PDWR54BTB/PDWR54BTW: 10 oz.
PDWR64BTB/PDWR64BTW: 14.5 oz.
- Cone Material: PP Mica + Rubber Surround
- Frequency Response:
PDWR54BTB/PDWR54BTW: 90Hz-20kHz
PDWR64BTB/PDWR64BTW: 45Hz-20kHz
- 4 Ohm Impedance
- Dimensions (L x W x H):
PDWR54BTB/PDWR54BTW: 5.75" x 7.09" x 9.88" -inches
PDWR64BTB/PDWR64BTW: 7.28" x 9.25" x 13.0"-inches

California Prop 65 Warning

WARNING:

This product may expose you to chemicals, which is known to the state of California to cause cancer, birth defects and other reproductive harm. Do not ingest.

For more info go to: www.P65warnings.ca.gov

FCC INFORMATION

WARNING: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This unit generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try and correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules.


Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.



MAINTENANCE, CLEANING, AND STORAGE

1. **Maintenance:** Regularly inspect the speakers and brackets for any signs of wear or damage. Tighten any loose components as needed to maintain a secure installation.
2. **Cleaning:** Use a soft, dry cloth to clean the speakers and brackets. Avoid using abrasive cleaners, solvents, or water, as these may damage the surface or internal components.
3. **Storage:** If the speakers are not in use for an extended period, disconnect them from the power source and remove them from the mounting brackets. Store the speakers and accessories in a cool, dry place, away from direct sunlight and moisture.

OVERALL DIMENSIONS

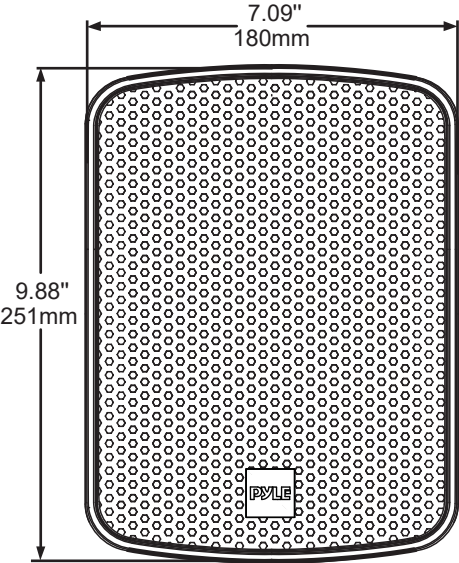

MODEL	DIMENSIONS (L x W x H)
PDWR54BTB	5.75" x 7.09" x 9.88" -inches
PDWR54BTW	
PDWR64BTB	7.28" x 9.25" x 13.0" -inches
PDWR64BTW	

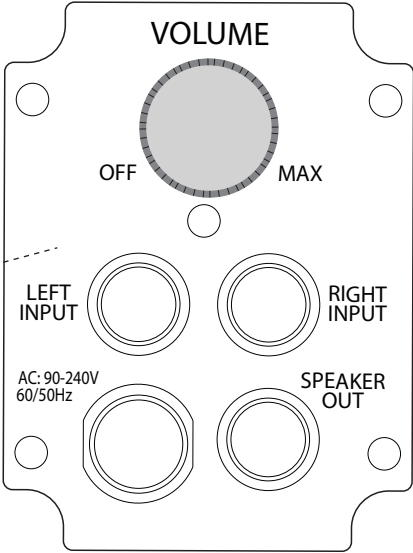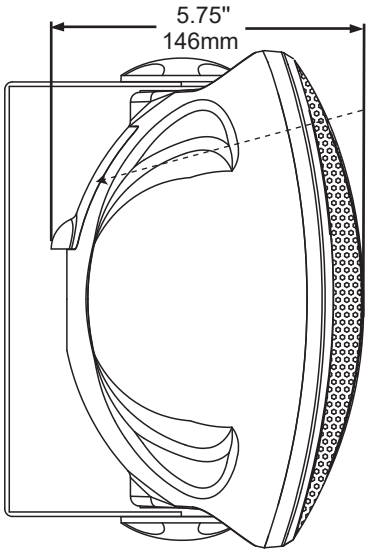



Controller

WIRELESS BT STREAMING CONNECTION

Ensure the Wireless BT Streaming feature is turned on for your device. When your device is within Bluetooth (BT) range, it will connect automatically. It will disconnect automatically when it is out of range.

PACKAGING CONTENTS

1. 2 Loudspeakers
2. 2 Brackets
3. 4 Bracket Bolts
4. 4 Screws
5. 1 Connection Wire
6. 1 RCA Wire

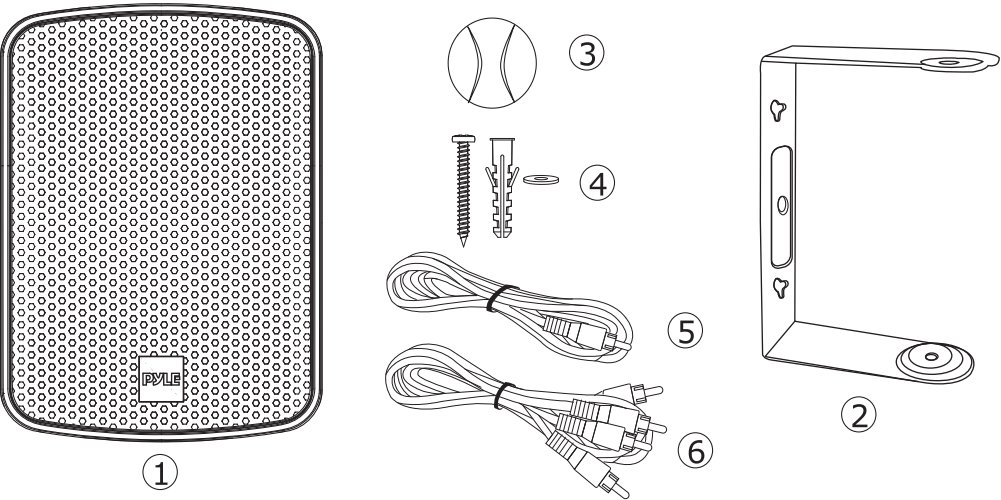


Screw for the bracket



Screw on the back

MOUNTING

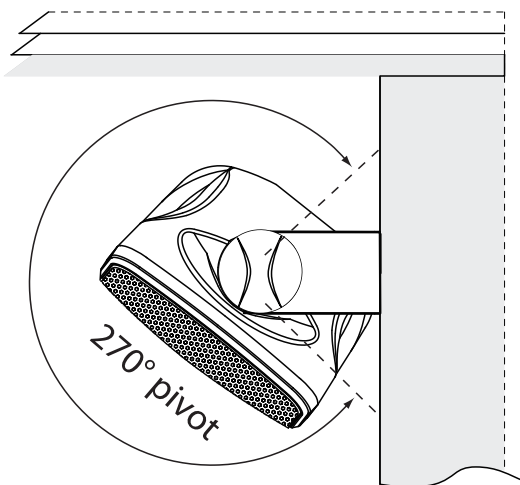

MOUNTING THE BRACKET:

1. Remove the bracket knobs and the bracket from the speaker.
2. Hold the bracket up to the mounting surface. The speaker can be mounted either horizontally or vertically. Ensure the speaker wire fits through the large, circular wire hole in the bracket. Align the bracket so it is square with the surroundings (use a level for accuracy).
3. Mark the locations of the three screw holes. Use all of the holes.
4. Drill pilot holes into the mounting surface.
5. Carefully pull the speaker wire through the wire hole in the center of the mounting bracket. Align the bracket so the holes line up.
6. Use the provided hardware to attach the bracket to the mounting surface.

FINAL ADJUSTMENTS

1. After confirming that the speaker is in phase and functioning correctly, angle the speaker for optimal sound.
2. Hand-tighten the bracket knobs only. Avoid using power tools, as they may over-tighten the knobs and strip the threads of the insert.
3. Ensure the entire installation is safe and secure.

Register Product

Thank you for choosing PyleUSA. By registering your product, you ensure that you receive the full benefits of our exclusive warranty and personalized customer support.

Complete the form to access expert support and to keep your PyleUSA purchase in perfect condition.

Start Here



[PyleUSA.com/pages/register](https://www.PyleUSA.com/pages/register)

PYLE[®]
PyleUSA.com



Questions or Comments?

We are here to help!

Phone: 1.718.535.1800

PyleUSA.com/ContactUs