

Visit Our Website



SCAN ME  
PyleUSA.com

# PLATV65BT - PLATV85BT

## Waterproof Marine Bluetooth Powered Speakers

**PYLE**  
PyleUSA.com  
**HYDRA**

### USER GUIDE

#### System Features:

- Universal Vehicle Mounting Ability
- Bluetooth Wireless Music Streaming
- Weatherproof & Water Resistant Housing
- Rugged Heavy-Duty Construction Design
- Full Range Stereo Sound Reproduction
- Dual Speaker 2-Way Audio System
- Built-in 2-Channer Digital Amplifier
- 'Plug & Play' Connection for Easy Installation
- Instant Connect & Stream Audio Ability
- Can be hard-wired or powered through a cigarette lighter port
- Engineered 'Tube' Design for Maximum Sound Projection
- Perfect for ATV, UTV, 4x4, Golf Carts, Jetski, Snowmobile & More!
- Includes Bluetooth Controller/In-Line Volume Control

#### Bluetooth Music Streaming:

- Wireless Audio Streaming Ability
- Works with All of Your Favorite Devices  
(iPhone, Android, Smartphones, iPad, Tablet, etc.)
- Bluetooth Version: 4.0
- Bluetooth Network Name: **Pyle**
- Bluetooth Network Password: **'0000'**
- Bluetooth Wireless Range: 30'+ Feet

#### Color-Changing LED Lights:

- Built-in Dancing / Flashing Lights
- 19 Dynamic Color Changing Modes
- Speed & Color Brightness Adjustable
- Multi-Color LED Lights: Red/Green/Blue
- Includes LED Lighting Remote Control

#### Product Technical Parameters

##### PLATV65BT

###### Technical Specs:

- Speakers: 6.5" (x2) Poly Injection Cone Speakers
- Tweeters: 1.0" (x2) Titanium Dome Diaphragms
- MAX Power Output: 800 Watt (400 x 2)
- RMS Power Output: 400 Watt (200 x 2)
- Frequency Response: 45-25kHz
- Signal-to-Noise Ratio: 90 dB
- Marine Grade IP-44 Rating
- Amplifier Class: AB
- Power: DC 12V
- Total Dimensions: 28.7" x 11.2" x 7.7"
- Bluetooth Console Dimensions: 4.6" x 1.6" x 1.1"

##### PLATV85BT

###### Technical Specs:

- Speakers: 8.0" (x2) Poly Injection Cone Speakers
- Tweeters: 1.0" (x2) Titanium Dome Diaphragms
- MAX Power Output: 1000 Watt (500 x 2)
- RMS Power Output: 500 Watt (250 x 2)
- Frequency Response: 20-25kHz
- Signal-to-Noise Ratio: 91 dB
- Marine Grade IP-44 Rating
- Amplifier Class: AB
- Power: DC 12V
- Total Dimensions: 32.5" x 12.2" x 9.3"
- Bluetooth Console Dimensions: 4.6" x 1.6" x 1.0"

**⚠ WARNING:** Cancer and Reproductive Harm - [www.P65warnings.ca.gov](http://www.P65warnings.ca.gov)

## Remote Control Features

1. **Turn On/Standby:** Press this key to turn **ON** unit or switch to stand by mode.

At power-on, the unit will automatically turn on and restore to the previous status.

2/9. **Dynamic Mode Adjust:** Switch to dynamic mode from static color, or switch between dynamic modes.

3/10. **Dynamic Speed Adjust:** Adjust dynamic playing speed. Press **SPEED+** to increase speed and press **SPEED-** to decrease. The unit will switch to dynamic mode if this key is pressed in static color mode.

4/5. **Static Color Adjust:** Switch to static color mode from dynamic mode, or switch between static colors.

6. **Direct Color Select:** Shortcut key to static colors. When pressing the specific color key, the LED will play the same static color. The direct colors are included in '**COLOR+**' and '**COLOR-**' operation.

7/8. **Brightness Adjust:** Adjust static color brightness. Press **BRIGHT+** to increase brightness and press **BRIGHT-** to decrease. The unit will switch to static color mode if this key is pressed in dynamic mode.

11. **Demo Mode:** Press this key to switch to Demo mode. In demo mode, it plays 17 dynamic modes in a loop, each mode repeating 3 times.



## IMPORTANT

- Please remember to remove plastic insulator from remote unit battery compartment.
- This remote uses a 3volt CR2025 type battery. When replacing the battery, be sure to use only the same type of battery.
- The remote signal can pass through most obstacles.
- **DO NOT** install the unit in areas surrounded by metal as the remote signal will not reach the unit.

## What's in the Box:

- Off-Road Speaker System
- Wiring Power Cable (DC 12V)
- LED Light Remote Control
- Fastening Straps



1. Cigarette Lighter
2. DC12V
3. Ribbon
4. RGB Remote Controller
5. 3.5mm Aux-in




## Installation

To mount the PLATV to your vehicle, use the four heavy-duty mounting straps included in the accessories package. Please ensure that the straps are pulled tight and the unit is strapped down properly to prevent any damage from occurring.

The PLATV can be powered by your vehicle's cigarette lighter port or wired directly to the ignition using the included cigarette lighter power connector. The RED wire goes to the RED (+) wire of the ignition harness.

The BLACK wire serves as a ground connection and should be connected to the vehicle chassis.

Ensure there is no paint or other insulator blocking the ground connection.

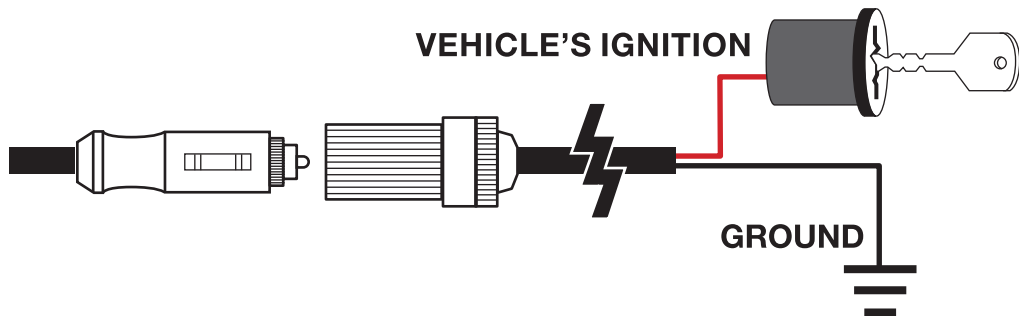

## Warning

**The power voltage must not exceed DC 12V.**

## Bluetooth

Make sure that your device is set to "**Discoverable.**" Turn on the Bluetooth device, search for **Pyle**, and enter the password 0000 for pairing. You will hear a tone and pairing is completed. You'll be listening to your favorite tunes in no time.

## Aux-In Connection

To connect a non-Bluetooth device, the Pyle features a 3.5mm input port located on the front of the unit.

Simply use the included 3.5mm to 3.5mm mini jack cable to connect the device to the Pyle.

Please note that connecting a device to the auxiliary port will disable the Bluetooth function.

## Waterproof

It can be used in the rain. However, do not submerge the product in water.

## Register Product

Thank you for choosing PyleUSA. By registering your product, you ensure that you receive the full benefits of our exclusive warranty and personalized customer support.

Complete the form to access expert support and to keep your PyleUSA purchase in perfect condition.



[PyleUSA.com/register](https://www.PyleUSA.com/register)

# Cleaning and Maintenance

## Cleaning:

- Use a soft, damp cloth to clean the exterior of the unit.
- Do not use abrasive cleaners, solvents, or chemicals.
- Avoid getting moisture in any of the openings.

## Maintenance:

- Regularly check the mounting straps for wear and tear. Replace them if they show signs of damage.
- Inspect the wiring and connections periodically to ensure they are secure and free from corrosion.
- Test the remote control functions periodically to ensure they are working properly.

## IC WARNING

### - English:

This device complies with Industry Canada licence-exempt RSS standard(s).

Operation is subject to the following two conditions: (1) This device may not cause interference, and (2) This device must accept any interference, including interference that may cause undesired operation of the device.

### - French:

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence.

L'exploitation est autorisée aux deux conditions suivantes: (1) L'appareil ne doit pas produire de brouillage; (2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

This equipment complies with IC RSS-102 radiation exposure limits set forth for an uncontrolled environment.

This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20cm de distance entre la source de rayonnement et votre corps.

## FCC STATEMENT

This equipment has been tested and complies with the limits for a Class B digital device, per part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses, and can radiate radio frequency energy, and if not installed and used per the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a specific installation. If this equipment does cause harmful interference to radio or television reception, determined by turning the equipment off and on, the user is encouraged to correct the interference with one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the distance between the equipment and the receiver.

Connect the equipment to an outlet on a different circuit from the one the receiver is connected to.

Consult the dealer or an experienced radio/TV technician for help.

Caution: Changes or modifications not explicitly approved by the manufacturer could void your authority to operate this equipment.

Compliance: This device complies with part 15 of the FCC Rules.

Operation is subject to the following conditions: (1) This device must not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

RF Exposure Information: The device meets general RF exposure requirements and can be used safely.



Questions or Comments?  
**We are here to help!**  
Phone: 1.718.535.1800  
[PyleUSA.com/ContactUs](http://PyleUSA.com/ContactUs)