



USER'S MANUAL



PPHP837UB

PPHP1037UB

PPHP1237UB

PPHP1537UB

Before using your new Speaker System Please review the following instructions, for the safety and investment.

INSTRUCTIONS

Before connecting the speaker, make sure the system is off and the controls on the minimum level. On the contrary the system could damage

- 1.Plug the power cable to the AC outlet and to the system and the speaker
- 2.Plug the microphone in the "MIC" input
- 3.Connect (CD, DECK, MP3, DVD, etc) on "LINE IN" input
- 4.Turn on the systems. A green LED will light up to indicate the speaker is on
- 5.Set the volume on the low level on the MIC and the LINE IN input
- 6.Increase the master volume (place on the right side of the LINE OUT *connector)
- 7.Set TREBLE and BASS controls to equalize the sound
- 8.A red LED will light up when the system detects overload power. You will must decrease the volume.

CAUTIONS

Do not place the microphone against the speaker, it can cause feedback echo and it will damage the system

EXTRA FUNCTIONS

6.3 And XLR connectors marker as LINE OUT can handle an amplifier or even another powered speaker cabinet. On the bottom of the speaker there is a hole to place a stand.

PPHP837UB

8"600 Watt Powered Two-Way Speaker With MP3/USB/Bluetooth w/Remote control

- 8 " Woofer
- compression Driver with 1 " Titanium Diaphragm
- 6.35mm mic inputs
- stereo RCA Line Input
- 6.35mm Line outputs
- Master Volume,Mic Level
- 3.5mmAux-In Compatible With All Digital Music Players,Including Iphone,with Remote control
- Bluetooth Streaming Music Function
- Play your Music Through a USB Flash Drive
- Frequency Response:45Hz-20KHz
- Power Output:300Watts RMS, 600Watts Peak
- Crossover Frequency:3.0KHz
- Integrated 35mm Speaker stand Mount
- Dimensions:11.8"WX9.8 "DX17.3"H
- Weight: 17lbs

PPHP1037UB

10"700 Watt Powered Two-Way Speaker With MP3/USB/SD/Bluetooth & Record Function w/Remote control

- 10" Woofer
- compression Driver with 1 " Titanium Diaphragm
- Full Featured 3 Channel Mixer
- XLR and 1/4" Mic Inputs
- XLR & stereo RCA Line Input
- 1/4" Line Outputs
- Master Volume,Treble,and Bass Controls
- 3.5mmAux-In Compatible With All Digital Music Players,Including Iphone,with Remote control
- Bluetooth Streaming Music Function
- Recording Your music to a USB SD Flash Card
- Play your Music Through a USB SD Flash Drive
- Frequency Response:30Hz-22KHz
- Power Output:350Watts RMS, 700Watts Peak
- Crossover Frequency:2.2KHz
- 110/220 Voltage Selectable
- Integrated 35mm Speaker stand Mount
- Dimensions:14.1"WX11.4"DX21.2"H
- Weight: 23lbs

PPHP1237UB

12"900 Watt Powered Two-Way Speaker With MP3/USB/SD/Bluetooth & Record Function w/Remote control

- 12" Woofer
- compression Driver with 1.34 " Titanium Diaphragm
- Full Featured 3 Channel Mixer
- XLR and 1/4" Mic Inputs
- XLR & stereo RCA Line Input
- XLR & 1/4" Line Outputs
- Master Volume,Treble,and Bass Controls
- 3.5mmAux-In Compatible With All Digital Music Players,Including Iphone,with Remote control
- Bluetooth Streaming Music Function
- Recording Your music to a USB SD Flash Card
- Play your Music Through a USB SD Flash Drive
- Frequency Response:30Hz-22KHz
- Power Output:450Watts RMS, 900 Watts Peak
- Crossover Frequency:2.2KHz
- 110/220 Voltage Selectable
- Carrying wheels and handle
- Dimensions:16.5"WX13.7"DX25.1"H
- Weight: 34lbs

PPHP1537UB

15"1200 Watt Powered Two-Way Speaker With MP3/USB/SD/Bluetooth & Record Function w/Remote control

- 15" Woofer
- compression Driver with 1.75 " Titanium Diaphragm
- Full Featured 3 Channel Mixer
- XLR and 1/4" Mic Inputs
- XLR & stereo RCA Line Input
- XLR & 1/4" Line Outputs
- Master Volume,Treble,and Bass Controls
- 3.5mmAux-In Compatible With All Digital Music Players,Including Iphone,with Remote control
- Bluetooth Streaming Music Function
- Recording Your music to a USB SD Flash Card
- Play your Music Through a USB SD Flash Drive
- Frequency Response:30Hz-22KHz
- Power Output:600Watts RMS, 1200 Watts Peak
- Crossover Frequency:2.2KHz
- 110/220 Voltage Selectable
- Carrying wheels and handle
- Dimensions:19"WX15.7"DX29.1"H
- Weight: 42lbs

SPECIFICATIONS:

	PPHP1537UB	PPHP1237UB	PPHP1037UB	PPHP837UB
Woofers				
Impedance	8 ohm	8 ohm	8 ohm	8 ohm
Sensitivity	98dB	97dB	96dB	94dB
Freq.Resp	30Hz -22KHz	30Hz -22KHz	40Hz -20KHz	45Hz -20KHz
Voice coil	75mm,3 inch	65mm,2.5 inch	50mm,2 inch	38mm,1.5 inch
Magnet	60 oz	50 oz	40 oz	30 oz
Tweeter				
Impedance	8 ohm	8 ohm	8 ohm	8 ohm
Sensitivity	110dB/m/w	110dB/m/w	110dB/m/w	110dB/m/w
Freq.Resp	600Hz-20KHz	600Hz-20KHz	600Hz-20KHz	600Hz-20KHz
Voice coil	1.75"	1.34"	1"	1"
Diameter Material	Titanium	Titanium	Titanium	Titanium

Electrical safety


All products are fitted with a detachable power cord (supplied) which connects to the AC mains and the back panel of the loudspeaker. The power cord has an IEC female connector on one end and male mains connectors on the other end. This cord is supplied specially to accommodate the different worldwide safety and electrical code requirements. The power cord supplied with your product has a 3-pin type plug. Do not cut off or damage the grounding plug. Like any electrical appliance, your EON powered speakers should not be used in water or when wet.

Product design and specifications are subject to change without previous notice.

PPHP837UB



Remote control

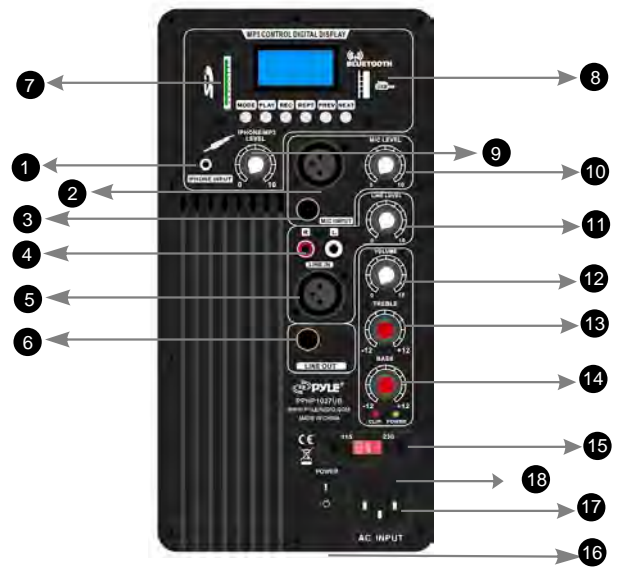

PPHP1037UB

1. Iphone input

Allows you to connect an Iphone with a 3.5mm connector.

2. Banlanced Microphone Input

Connector for a balanced microphone input .

3. Microphone input

Allows you to connect a microphone with a 6.3mm connector.

4. RCA Line-In

Allows you to connect an external audio device(CD, radio / DVD,etc) with RCA connectors

5 .XLR Line-In

Allows you to connect an external audio device (CD, radio / DVD,etc) with XLR connectors

6. Signal output

Use 6.35mm jack to connect amplifier or even another powered speaker cabinet in cascade using a XLR connector

7/8. SD card /USB

9.MP3/ Iphone Volume control

Set the MP3/ Iphone volume level

10.Mic volume control

Use this control to set the volume level of Microphone

11.Line-In signal volume control

Use this control to set the volume level of the Line-In signal

12. Volume control

Set the volume level9

13. Treble

Use it to set the treble level

14. Bass

Use it to set the bass level

15 AC 110/220 Voltage Selectable

16. On/Off Power Switch

Press to power on/off the speak box

17. AC power


To connect the AC power cord

18 .Fuse



A B C D E F

- A.MODE: Press to change USB/SD/Bluetooth
- B.PLAY: Press to play s son or pause while playing a song.
- C.REC: Recording to USD or SD.
- D.REPT:Press to select repeat mode: one, all or random.
- E:PREV: Press to jump to the previoud song.
- F:NEXT: Press to jump to next song.

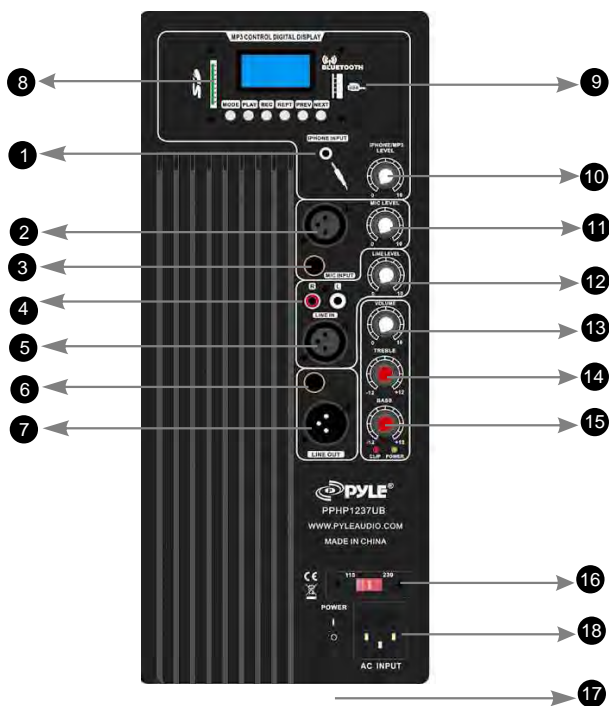

PPHP1237UB



Remote control



PPHP1537UB

1. IPhone input
Allows you to connect an IPhone with a 3.5mm connector.
2. Balanced Microphone Input
Connector for a balanced microphone input.
3. Microphone input
Allows you to connect a microphone with a 6.3mm connector.
4. RCA Line-In
Allows you to connect an external audio device (CD, radio / DVD, etc) with RCA connectors
5. XLR Line-In
Allows you to connect an external audio device (CD, radio / DVD, etc) with XLR connectors
- 6/7. Signal output
Use 6.35mm jack to connect amplifier or even another powered speaker cabinet in cascade using a XLR connector
- 8/9. SD card / USB
10. MP3/ IPhone Volume control
Set the MP3/ IPhone volume level
11. Mic volume control
Use this control to set the volume level of Microphone
12. Line-In signal volume control
Use this control to set the volume level of the Line-In signal
13. Volume control
Set the volume level
14. Treble
Use it to set the treble level
15. Bass
Use it to set the bass level
16. AC 110/220 Voltage Selectable
17. On/Off Power Switch
Press to power on/off the speaker box
18. AC power
To connect the AC power cord

Instruction of Bluetooth Function:

1. Press 'MODE' to enable Bluetooth and connection to your device
2. Once 'Bluetooth' appears on the LCD screen it will read 'connected' or 'unconnected' whether your device has paired with the speakers
3. Allow the speakers to search for Bluetooth connection
4. Once, a Bluetooth connection is established with a paired device, the screen will prompt you for a 4-digit pass code, enter "0000" and agree to connect
5. The LCD screen will read 'connected' and a Bluetooth connection has been established

Instruction of Record Function:

By pressing the 'REC' button you will have the ability to record to USB and SD memory cards. Once your selected memory device is inserted (ei. USB Flash or SD memory card) you will be able to record and delete audio files directly from the speaker's control center and LCD screen.



2-Way High-Powered Speaker with MP3, Bluetooth Music Streaming, Record Function, USB and SD Memory Readers & Remote Control