

PYLE
PyleUSA.com



VISIT US ONLINE:
Have a question?
Need service or repair?
Want to leave a comment?
PyleUSA.com/ContactUs

PYLE

Questions? Issues?

We are here to help!

Phone: (1) 718-535-1800

Email: support@pyleusa.com




PVT90

Wireless BT Tube Amplifier Stereo Receiver

4 Vacuum Tube Power Amp, Built-in USB Playback,
LED Display, Multimedia Disc Inputs(L/R),
Optical/Coaxial Inputs Jack, Subwoofer Output, 700 Watts

Front and Back Panel

1. Power ON/OFF Switch
2. USB reader
3. Blue LED display screen
4. Master Volume Controller
5. Input select
6. Previous Song
7. Play/Pause Function
8. Next Song
9. CD/DVD Inputs (L/R)
10. CD/DVD Inputs (L/R)
11. Coaxial Input Jack
12. Subwoofer Output
13. Optical Input Jack
14. Speaker Output
15. Speaker Output
16. Cooling Fan
17. AC 120V/240V Input
18. 120V/240V Voltage Selector

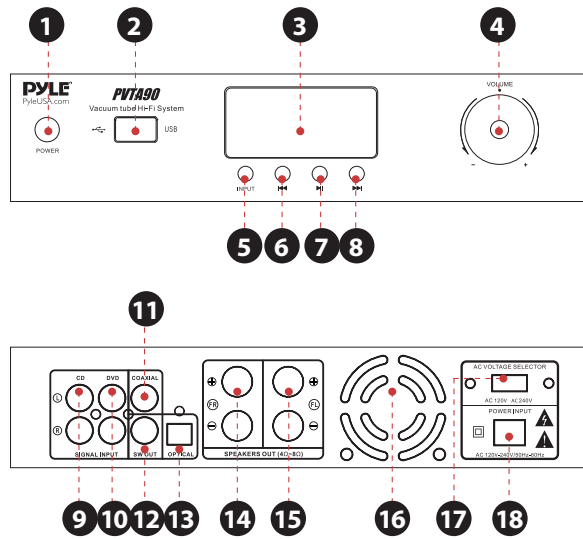

WIRELESS BT STREAMING OPERATION INSTRUCTION:

External devices which have a built-in Wireless BT feature can be connected to this amplifier wirelessly to play through the amplifier's speakers. If your amp is connected to speakers, you will hear audible tones which will help for connecting.

1. Press the "INPUT" button located on the front panel and select "BT" mode.
2. Turn ON the Wireless BT of your external device.
3. Search for available BT devices and make sure to be within range of your amp, and wait for your device to select "Pyle Speaker" on the pairing devices lists of Wireless BT networks.
4. The unit is automatically ready to pair with your devices when you hear audible tones.
5. Now you can play music on your external device through the amplifier.



This product can expose you to a chemical or group of chemicals, which may include "Lead (Pb)" which is known in the state of California to cause cancer, birth defects, or other reproductive harm. For more info, go to <https://www.p65warnings.ca.gov/>.

WARNING:

Features:

- 4 Vacuum Tube Power Amp
- Wireless BT Streaming Ability
- Built-in USB Playback
- LED Display
- Built-in Cooling Fan
- Blue LED Screen for Media Playback Information
- Double-sided Fiber Circuit Board
- CD/DVD Inputs (L/R)
- Subwoofer Output
- Optical/Coaxial Inputs Jack
- Master Volume Control

Wireless BT Connectivity:

- Receives Wireless Signal for Audio Streaming
- Simple & Hassle-Free Pairing Setup
- Integrated Antenna for Extended Wireless Range
- Works with All of Today's Latest Devices (Smartphones, Tablets, Laptops, Computers, etc.)
- Wireless BT Version: 4.2
- Wireless BT Network Name: 'Pyle Speaker'
- Wireless Range: 40'+ Ft.

What's in the Box:

- Wireless BT Tube Amplifier
- Power Cable
- Remote Control

Technical Specs:

- Power Output: 1000 Watts Peak Power
- Power supply: AC 120V/240V
- Remote Control Battery: Need 2x 'AAA' Battery (not included)
- Construction Material: Aluminium
- Amplifier Chip: C5198/A1941
- Rated output power: 2*50W /4Ω
- Audio input: RCA input +USB input+Bluetooth input+Optical/Coaxial Input
- Audio output: 1 set of Banana Speaker Jacks
- Signal to noise ratio: > 75dB
- Dimension (L x W x H): 13.78" x 13.39" x 8.46" –inches