

PYLEPRO

PyleUSA.com



PWMKRDJ84BT

Active PA Wireless BT Streaming Loudspeaker

Portable Stereo Speaker System, Karaoke Microphone Talkover,
MP3/USB/Micro SD/FM Radio

USER MANUAL

I. Features

1. Ultra-large magnetic circuit high-sensitivity speaker with high penetrating power, low-frequency shock and perfect medium-/ high-frequency representation.
2. The latest decoding chips supporting stably playback of MP3 in up to 32G Micro SD Memory Card
3. FM Radio reception-high-quality digital radio with automatic channel search and storage of up to 60 channels.
4. 3.5mm AUX audio input for each connection to a wide range of sound sources.
5. Built-in high-capacity battery for consecutive playback of up to 2 hours.
6. Connect the microphone, adjustable reverberation, voice and Karaoke function to present outstanding performance.
7. Battery with built-in recharging protection to present a long and stable service life.
8. Built-in low battery and full recharging indication. Human-oriented use.
9. Outputs to earphone or external sound sources.
10. Record your favorite FM radio station or other AUX sound source to enjoy the music wherever you like.
11. Microphone input recording to act as your personal business assistant.
12. With Bluetooth function.

II. Recording

1. Recording in AUX Mode:

Connect a storage device (**USB/Micro SD Memory Card**) and press **Mode** key to enter **AUX** mode. Short press **Record** key to start recording for a time depending on the storage capacity. During recording, the input signal should be in proper strength as you like.

2. Recording in FM Receiving Mode:

Connect a storage device (**USB/Micro SD Memory Card**) and press **Mode** key to enter **FM** mode. Select your favorite radio station and short press record key to start recording for a time depending on the storage capacity. During recording, keep the device in a proper location where the radio signal will be received best to ensure optimized recording performance.

3. Recording via External Microphone:


Connect a storage device (**USB/Micro SD Memory Card**) and short press **RECORD** key to start recording for a time depending on the storage capacity. During recording, tune the “-ECHO+” knob to the minimum. It is noticeable that the microphone should be located a proper distance away from the speaker to prevent any howl-round or noise.

Notes: This product starts recording from the time as displayed on the LED screen.


III. The Bluetooth Pairing Operation and Related Parameters:

1. **ON/OFF:** Switch the power to **ON**, press "**MODE**" key to enter Bluetooth mode, the display screen will show "**BLUE**".
2. Go to the Bluetooth settings on your Smartphone/Tablet and scan for Bluetooth devices. Search fo "**PyleUSA**" input password "**0000**" if necessary or needed. After pairing succesful, the speaker will send out a voice of prompt.
3. Play music and audio files on your device.

IV. Functional Operations and Features

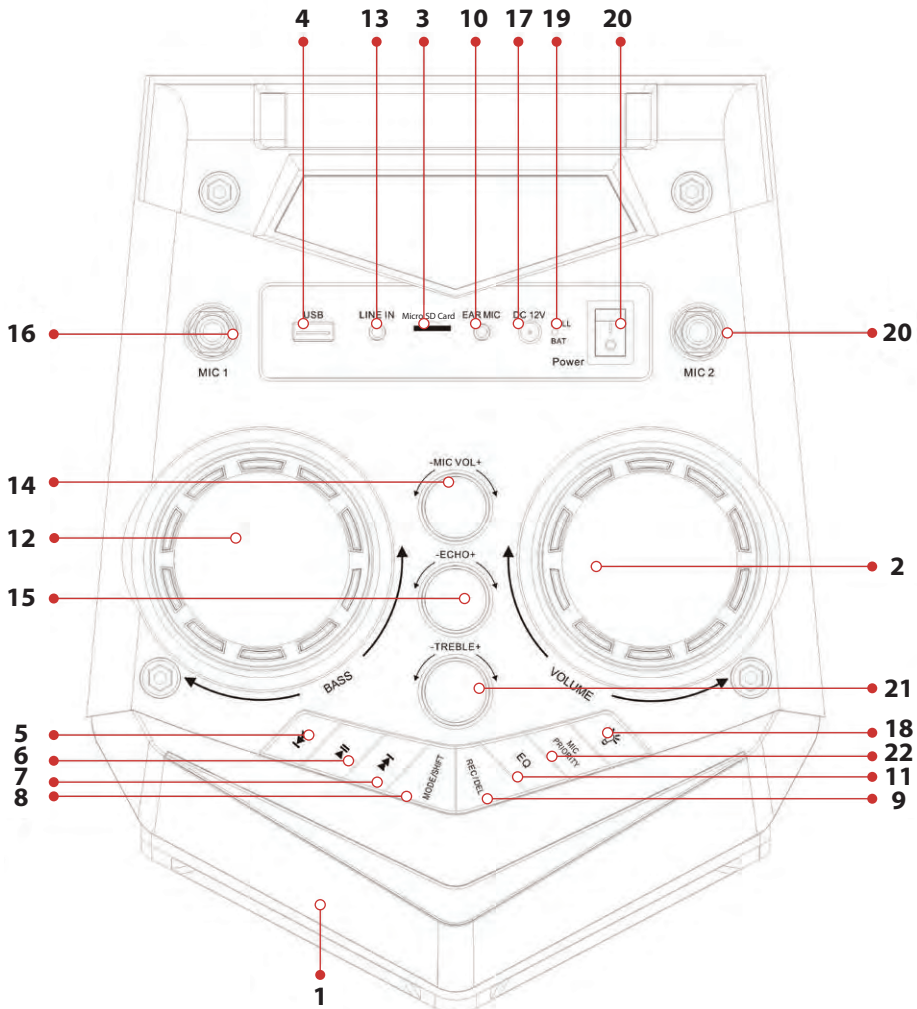







1. **LED Screen**
2. **Master Volume:** In MP3/FM/AUX mode, use it to regulate volume output from the speaker.
3. **Micro SD Memory Card Slot:** Read audio files in MP3 format in Micro SD Memory Card Slot in capacity up to 32G (FAT32).
4. **USB Port:** Read audio files in MP3 format in USB storage device in capacity up to 32G (FAT32).
5. **◀◀:** In FM receiving status, short press to select the previous channel after a full station search has been executed.
6. **▶▶:** In USB/Micro SD Memory Card reading status, short press to play/pause, or press and hold for 5 sec. to select one of four playback sequencing modes (**All** - play all tracks in sequence; **ONE** - repeat one track). In FM receiving status, press and hold for 5 sec. to execute a full search (it is recommended to execute at least one full search before using radio receiving function. All founded stations will be saved even in power off). In AUX input / FM radio status, short press to toggle between mute and normal volume.
7. **▶▶:** In USB/Micro SD Memory Card reading status, short press it to go to the previous track. In FM receiving status, short press to select the next channel after a full station search has been executed.
8. **Mode/SHIFT:** Short press to toggle between USB/Micro SD Memory Card and FM receiving modes. long press it to toggle between recording folder and MP3 folder.
9. **Recording/DEL:** Short press to enable recording (USB/Micro SD Memory Card storage device needs be connected first). During recording, reverberation should be tuned to minimum. Press and hold to delete a recorded file. Recording in AUX or FM mode is available.
10. **EAR MIC:** Headphone/MIC Port
11. **EQ: Environment Switching:** In USB/Micro SD Memory Card reading status, short press to select an environment mode (from Square, Meeting, Home, Hall and Personal).
12. **BASS:** The bass control knob
13. **LINE IN:** External sound source input port (plug-and-play).

14. **Microphone Volume:** Microphone volume regulating knob.
15. **Reverberation:** Microphone reverberation regulating knob.
16. **Microphone Input:** Microphone input jack
17. **DC 12V Recharging:** DC 12V recharging port.
18. : Control the flash light switch.
19. **Recharging Indicator Light:** When the charger is connected, red light turns on. When the device is fully charged, blue light turns on.
20. **Power Switch:** " — " - ON; " ○ " - OFF.
21. **TREBLE:** The control knob of treble
22. **MIC PRIORITY:** Connect the microphone, short press microphone priority mode key.
22. **IR:** Infrared remote receiver module

V. Operation Instructions on Remote Control



1. **Power Button:** Short press to enter standby mode; short press it again to resume. If no device is connected, the system goes to "-NO-".
2. : Functions as "  " on the master device.
3. : Functions as "  " on the master device.
4. : Functions as "  " on the master device.
5. **Mode:** Functions as "Mode" on the master device.

6. **V+/V- Keys:** In USB/Micro SD Memory Card/FM/AUX mode, press them to volume up/down.
7. **Numeric Keys 0~9:** In USB/Micro SD Memory Card reading status, to play Track 12, just input numbers "1" and "2", and in 2 seconds the system will go to Track 12 and start playback. Any input of number larger than number of the total available tracks is invalid. In FM status, to listen to channel 107.5MHZ, just input "1075".
8. **Environment Key:** In USB/Micro SD Memory Card reading status, short press to toggle among Square, Meeting, Home, Hall and Personal modes.
9. **Sequencing Key:** In USB/Micro SD Memory Card reading status, short press it to toggle among four playback sequencing modes (**All** - play all tracks in sequence; **RAND** - play in random; **ONE** - repeat one track; **FOL** - repeat all tracks in a folder).
10. **Mute Key:** In USB/Micro SD Memory Card/FM/AUX mode, short press it to mute the device.
11. **100+ Number Selection Key** - in MP3 mode (USB/Micro SD Memory Card), short press to add "100" to current track number.
12. The situation is not transferred to Taiwan on a frequency point, the case of Taiwan is transferred to a radio station.
13. The situation is not transferred to a frequency point, the case of Taiwan is transferred to a radio station

CAUTION: *Please be sure to charge the unit if the music became distorted.*

PWMKRDJ84BT

Active PA Wireless BT Streaming Loudspeaker

Portable Stereo Speaker System, Karaoke Microphone Talkover,
MP3/USB/Micro SD/FM Radio

Features:

- Karaoke & Music Streaming Speaker System
- Compact, Portable & Powerful
- Bluetooth Wireless Audio Streaming
- Built-in Rechargeable Battery
- Flashing DJ Party Lights
- FM Radio with Digital LCD Display

What's in the Box:

- Cabinet Speaker
- AUX Cable
- Wireless Microphone
- Power Adaptor
- Remote Control

- USB Flash & Micro SD Memory Card Readers
- MP3 Digital Audio File Compatibility
- Includes Handheld Wireless Microphone
- Audio File Recording Function
- Headphone Jack
- Aux (3.5mm) Input
- Microphone Input
- Connect & Stream From External Devices
- Full Range Stereo Sound Reproduction
- Impressive Bass Response
- Convenient Carry Handle
- Rugged & Heavy Duty Design
- Top Panel Button Control Center

Bluetooth Connectivity:

- Built-in Bluetooth for Wireless Streaming
- Works with All of Your Favorite Devices (Smartphone, Tablet, Laptop, Computer, etc.)
- Bluetooth Network Name: 'PyleUSA'
- Bluetooth Password: '0000'
- Bluetooth Wireless Range: 65'+ Ft.
- Bluetooth Version: 2.0

Audio Recording:

- It's Easy: One Button Recording Activation
- Record Audio as Streamed through the Speaker System
- Ability to Record Vocals via Microphone
- Records to USB Flash or Micro SD Card
- Audio File Type Created: .MP3
- Easy Transfer to PC & Mac

Technical Specs:

- Power Output: 500 Watts
- Battery: Polymer battery 11.1V 4000MAH
- Impedance: 4 Ohm
- Frequency Response: 100-20kHz
- Sound Distortion: <1.0%
- S/N Ratio: 80dB
- Max USB/SD Memory Card Support: 32GB
- Power: 100/240V (DC 12V Power Adapter)

PYLEPRO

PyleUSA.com



VISIT US ONLINE:

Have a question?

Need service or repair?

Want to leave a comment?

PyleUSA.com/ContactUs

PYLE