

# SereneLife



## *SLAPF18*

**Electronic Dry Pet Food Feeder**  
Automatic Programmable 6L Capacity  
Dry Pet Food Dispenser

## **USER MANUAL**

## Key Features

**Large Capacity Hopper**  
6L (around 6lbs. dry food)

**Humanized Design**  
Setting

**Voice Record/Play**  
at the programmed meal time

**Accurate Portion**  
**Control**



**Two Power Supply**  
Battery and Power adaptor

## How to Assemble and Use:

1. Assemble the bowl. Apply power, plug in the power adaptor.  
If you do not want to use the power adaptor, you can use the battery.



**Bowl**

**Plug in**  
**USB cable**



**USB cable**

**Adaptor**

2. Install batteries to the base (3 new “D” Cell, alkaline batteries. **Batteries NOT included**). Make sure the power switch is in the **ON** position.

Make sure the power switch is in the “I” position



Be sure to match positive and negative markings



3. Set the feeder by following the instructions.


### Interface



### Quick Setting Guide

1. **Manual Feeding Option and Function Check:** Press and hold “**Manual**” button for 3 seconds, the rotor will rotate 1 portion. Repeat for 2 more times. If each time it feeds 1 portion, it means the machine has no problem.

Manual Button

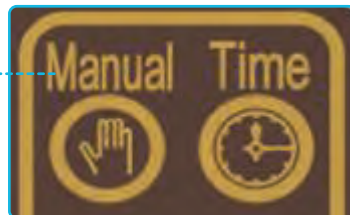

2. **To Set Current Time:** Press and hold “**Time**” and “**Hour**” button simultaneously, then click “**Hour**” button to set current hour

**Note:** Always hold “**Time**” button while you click

Press and hold “**Time**” and “**Minute**” button, then click “**Minute**” button to set the minute. *For example: Current time is 21:51*



3. **To Set Breakfast Meal:** Press and hold “**Breakfast**” and “**ON/OFF**” button to set breakfast feeding or not. Press and hold “**Breakfast**” and “**Meal Size**” button to set meal size. Press and hold “**Breakfast**” and “**Hour**” button to set breakfast hour. Press and hold “**Breakfast**” button and “**Minute**” button to set breakfast minute.

#### Meal Size

- **Model S:** Small meal size for Small & Medium pets  
**Programmable:** 1 to 39 portions (5g -195g)
- **Model L:** Large meal size For Medium & Large pets  
**Programmable:** 1 to 39 portions (10g -390g)



**On = Feeding Breakfast**  
**Off = No Breakfast**



4. **To set lunch and dinner meal and 4th meal:** Press and hold “Lunch” and related button to set lunch meal. Press and hold “Dinner” and related button to set dinner. Same goes with 4th meal.

**Lunch:**

OFF = No Feeding ●



**Dinner:**

ON = Feeding ●



**4th Meal:**

ON = Feeding ●



5. **To set voice recording and play:** Press and hold “MIC” button for 3 seconds until LCD flashes to record your voice. To check your voice recording, press and hold “Play” button for 3 seconds.



Voice Recording ●

Voice Play button ●

MIC Location ●

## CLEANING:

1. Disassemble the Hopper. Press "**PUSH IN**" button at both side of base.
2. Clean the unit with a soft dry cloth and dry.

**Warning:** Base unit should not be submerged in water at any time, this will damage electronic components and void the warranty.



## TROUBLESHOOTING:

1. The "**Low Battery**" light is flashing?
  - Replace 3 new "**D**" Cell alkaline batteries. Normally 3 new "**D**" Cell alkaline batteries can last around 1 year.

## WARNING:

- Requires 3 "**D**" size batteries.
- **Batteries NOT included.**
- Use only alkaline batteries.
- Estimated life of one set of batteries is one year.
- Keep fingers and hands clear of food wheel.
- Always turn unit **OFF** before cleaning.
- Always turn unit **OFF** before adding food.
- Always turn unit **OFF** before removing lid or hopper.
- Check the low battery light frequently to be sure the feeder has power.
- Check the level of food frequently, to be sure the feeder is dispensing properly.
- Always keep clear cover firmly snapped down over the Control Panel.

**Note: SLAPF18** has 2 models

1. **Model S:** For Small and medium size pet.  
**Programmable:** 1 to 39 portions (5g -195g)
2. **Model L:** For medium and large size pet  
**Programmable:** 1 to 39 portions (10g -390g)

## SLAPF18

### Electronic Dry Pet Food Feeder

Automatic Programmable 6L Capacity Dry Pet Food Dispenser

#### Features:

- Dual Function Manual and Automatic Pet Food Feeder
- Programmable Dispenser Ensures Optimal Feeding Schedule
- Close-Fitting Lid Keeps Pet Food Fresh Longer
- Large Capacity 6L Hopper Bin for Multiple Feedings
- Certified Pet-Safe: Made of BPA-Free Plastic
- Wide LCD Display Time, Meal Size and Status
- Soft Touch Menu Buttons
- Removable Parts for Hassle Free Cleaning
- Portable: Optional Plug-in or Battery Operated
- Requires 3 'D' Cell, Alkaline Batteries (not included)
- Adjustable Dispenser for Small and Large Serving Portions
- Ideal for Small or Large Pet
- \*Dry Pet Food Only

#### What's in the Box:

- Storage Bin
- Bowl
- Power Cord

#### Technical Specifications:

- Construction Material: ABS
- Storage Capacity: 6L
- Serving Portions: Small Dispenser: 5g – 195g, Large Dispenser: 10g -390g
- Battery Operated: x3 'D' Cell Alkaline Batteries
- Power Cord Length: 9.84' Ft.
- Power Supply: 5V DC 1A
- Dimensions (L x W x H): 8.26" x 13.7" x 14.1" -inches



SereneLife