



MANUFACTURER'S LIMITED ONE YEAR WARRANTY

PYLE USA warrants this unit to be free from defective material or workmanship and will repair or replace this unit or any part thereof if it proves defective in normal use or service within one(1) year from the date of original purchase.

Our obligation under this warranty is limited to the repairing or replacing, at our discretion, the defective instrument or any part thereof when it is returned, transportation prepaid to the Pyle Service Center at the address below. This warranty will be considered void if the unit has been tampered with, improperly serviced, subjected to abuse or misuse or if installed in a commercial vehicle. This warranty does not cover accidental damage. When returning this unit for service, please include \$15.00 for return postage and handling.

Send your unit to:

PYLE SERVICE CENTER
1600-63rd Street
Brooklyn, New York 11204 USA

IMPORTANT: Pack carefully in original carton if possible. We are not responsible for damage incurred in returning items for repair. A letter stating your exact street address, daytime phone number and the problem you are experiencing should be included. You must also enclose a copy of the original receipt as proof of purchase.

Register Online@www.PyleUSA.com

About Pyle PLWCH Series Woofer

congratulations !

You have just purchased one of the most advanced subwoofers in the history of car audio. Pyle PLWCH Series Woofer is the latest series, which has been designed and engineered for consistent and high performance.

Let's enjoy the nice music that PLWCH Woofer provided.


PLWCH10D

- 10" High Quality Poly Mica Cone
- Butyl Foam Surround
- Dual 2.0" High Temperature Kapton Voice Coil
- 60 Oz Magnet Structure
- Power Handling: 500 WATTS RMS/1000 WATTS Peak
- Frequency Response: 30Hz-2.2KHz
- Impedance(Per Coil): 4 OHM
- Efficiency: 91 dB
- Includes Installation Template

PLWCH12D

- 12" High Quality Poly Mica Cone
- Butyl Foam Surround
- Dual 2.5" High Temperature Kapton Voice Coil
- 75 Oz Magnet Structure
- Power Handling: 600 WATTS RMS/1200 WATTS Peak
- Frequency Response: 28Hz-2.2KHz
- Impedance(Per Coil): 4 OHM
- Efficiency: 91 dB
- Includes Installation Template

PLWCH10D PLWCH12D

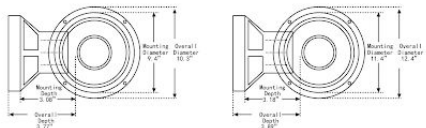

Specification	PLWCH10D	PLWCH12D
Power(Watts Peak)	1000	1200
Nom.Impedance(Ohm)	4	4
Voice Coil	2.0"	2.5"
Magnet Structure	60	75
Fs(Hz)	31.7	29.1
Qms	4.07	4.08
Qes	0.46	0.44
Qts	0.41	0.396
SPL(dB)	90	92
Vas(L)	49.69	102.18

Pyle PLWCH Series Woofer continually strives to improve the performance and value of its products- all specifications are subject to change.

PLWCH10D/12D/144*214mm/80g双铜/4页